


SC plug (male) / SC plug (male) Adapter  
 DC-11GHz

## AD-SC1SC15A / 144-144

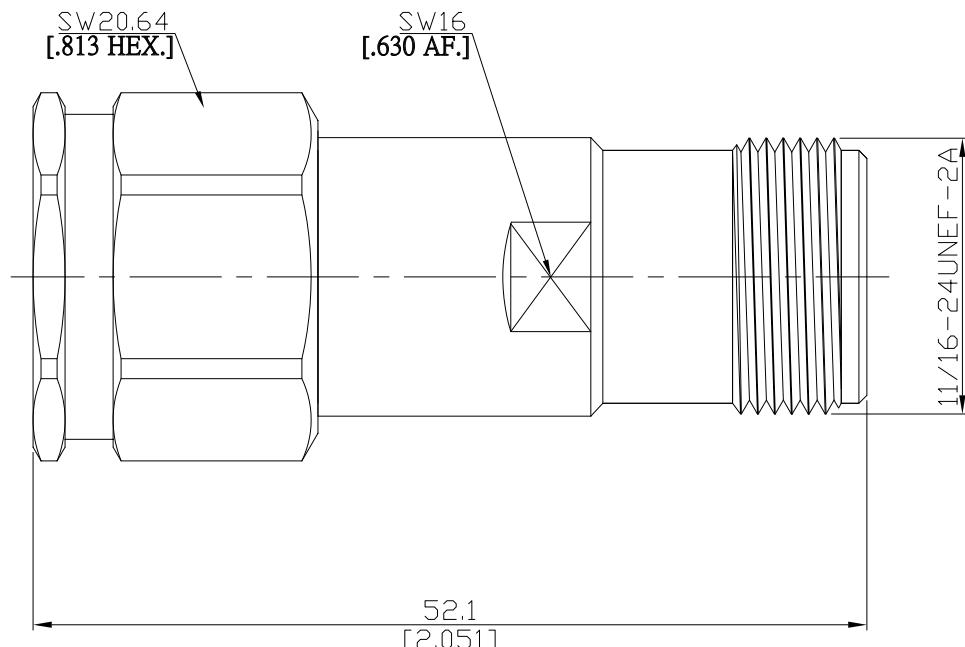

All dimensions are in mm [inch]

Tolerances according to DIN ISO 2768-mH

**Interface**

According to MIL-C-39012; MIL-STD-348A/309

**Electrical Data**

Impedance 50 Ω

Frequency DC to 11 GHz

**Mechanical Data**

Coupling mechanisms Screw-lock

Mating Cycles ≥ 500

**Environmental Data**

Temperature Range -65°C to +165°C

RoHS compliant

**Material And Plating**

Piece Parts (SC)	Material	Plating
Centre contact	Brass	Gold plating, 3 µinch (Non-magnetic nickel-phosphorus underplating, 80 µinch)
Body	Brass	Copper-Tin-Zinc Alloy
Insulator	PTFE	
Coupling nut	Brass	Copper-Tin-Zinc Alloy
Piece Parts (SC)	Material	Plating
Centre contact	Brass	Gold plating, 3 µinch (Non-magnetic nickel-phosphorus underplating, 80 µinch)
Body	Brass	Copper-Tin-Zinc Alloy
Insulator	PTFE	
Coupling nut	Brass	Copper-Tin-Zinc Alloy

**Packing**

Single or 100