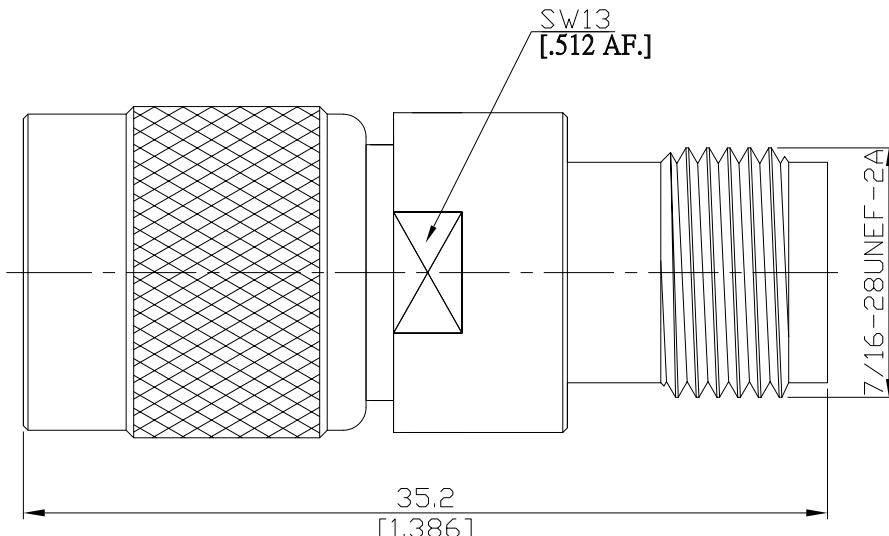


TNC plug (male) / TNC jack (female) Straight Adaptor
 DC-11 GHz, VSWR ≤ 1.25

AD-T1T25B / H44-H4


All dimensions are in mm [inch]

Tolerances according to DIN ISO 2768-mH

Interface

according to

MIL-C-39012;MIL-STD-348A/313

Electrical Data

| | |
|---------------------------|------------------------------|
| Impedance | 50 Ω |
| Frequency | DC to 11 GHz |
| VSWR (Return Loss) | ≤ 1.25 (≥ 19.08 dB) |
| Insertion Loss | ≤ 0.05 x \sqrt{F} (GHz) dB |
| Insulation resistance | ≤ 5 mΩ |
| Center contact resistance | ≤ 1.5 mΩ |
| Outer contact resistance | ≤ 1 mΩ |
| Test voltage | 1500 V rms |
| Working voltage | 500 V rms |
| Power handling | ≤ 80 W @ 2 GHz |

Material And Plating

| Piece Parts (TNC) | Material | Plating |
|-------------------|-----------------|--|
| Centre contact | Phosphor Bronze | Gold plating, 3 µinch (Non-magnetic nickel-phosphorus underplating, 80 µinch) |
| Body | Brass | Copper-Tin-Zinc Alloy |
| Insulator | PTFE | |
| Gasket | Silicone Rubber | |
| Coupling nut | Brass | Copper-Tin-Zinc Alloy |
| Piece Parts (TNC) | Material | Plating |
| Centre contact | Phosphor Bronze | Gold plating, 3 µinch (Non-magnetic nickel-phosphorus underplating, 80 µinch) |
| Body | Brass | Copper-Tin-Zinc Alloy |
| Insulator | PTFE | |

TNC plug (male) / TNC jack (female) Straight Adaptor
DC-11 GHz, VSWR ≤ 1.25

AD-T1T25B / H44-H4

Mechanical Data

| | |
|-----------------------------------|--------------------|
| Coupling mechanisms | Screw-lock |
| Mating cycles | ≥ 500 |
| Center contact captivation: axial | ≥ 15 N |
| Coupling test torque | ≤ 1.7 Nm |
| Recommended torque | 0.46 Nm to 0.69 Nm |

Environmental Data

| | |
|---------------------|---------------------------------|
| Temperature Range | -65 °C to +155 °C |
| Thermal shock | MIL-STD-202, Meth. 107, Cond. B |
| Corrosion | MIL-STD-202, Meth. 101, Cond. B |
| Vibration | MIL-STD-202, Meth. 204, Cond. B |
| Shock | MIL-STD-202, Meth. 213, Cond. G |
| Moisture resistance | MIL-STD-202, Method 106 |
| RoHS | compliant |

Packing

Single or 100