



 Adaptor jack/jack
 TNC jack (female) / TNC jack (female)

AD-T2T25A/94-94

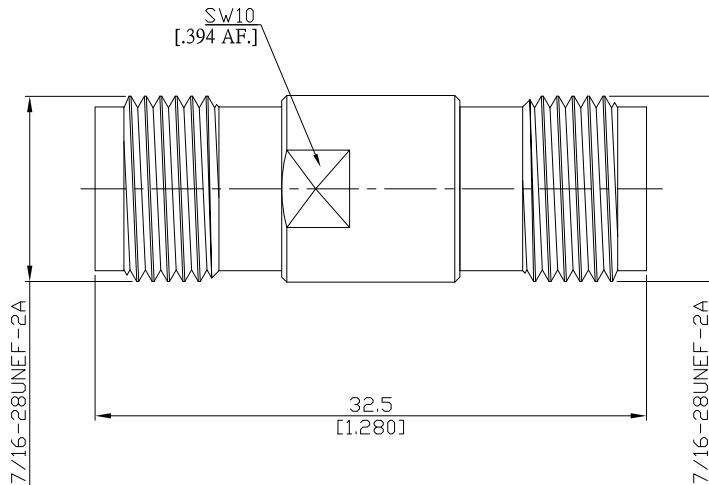

All dimensions are in mm [inch]

Tolerances according to DIN ISO 2768-mH

Interface

According to

IEC 60169-17; MIL-C-39012; MIL-STD-348A/313

Electrical Data

Impedance

50 Ω

Frequency

DC to 11 GHz

VSWR (Return Loss)

 ≤ 1.25 (≥ 19.08 dB)

Insertion Loss

 $\leq 0.1 \times \sqrt{f} \text{ (GHz)}$ dB

Mechanical Data

Coupling mechanisms

Screw-lock

Weight

N/A

Environmental Data

Temperature range

-65°C to +165°C

RoHS

compliant

Material And Plating
Piece Parts (TNC)
Material
Plating

Centre contact

Beryllium Copper

Gold plating(Nickel underplated)

Body

Brass

Copper-Tin-Zinc Alloy

Insulator

PTFE

Piece Parts (TNC)
Material
Plating

Centre contact

Beryllium Copper

Gold plating(Nickel underplated)

Body

Brass

Copper-Tin-Zinc Alloy

Insulator

PTFE

Packing

Single or 100