


Adaptor jack/jack  
 TNC jack (female) / TNC jack (female)

AD-T2T25A/9X-9X

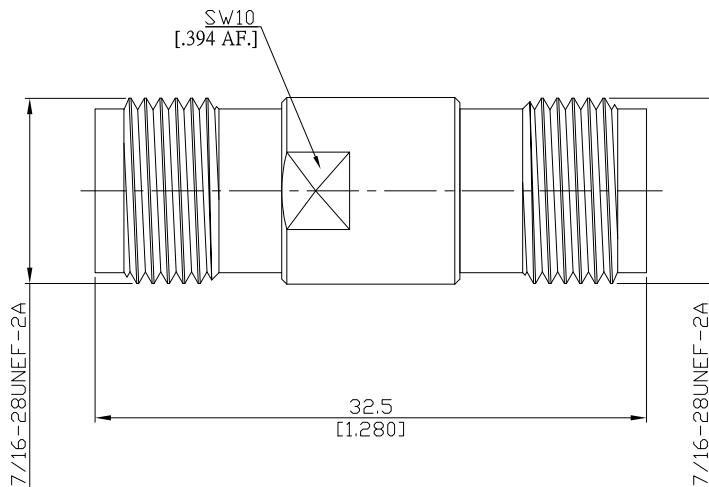

All dimensions are in mm [inch]

Tolerances according to DIN ISO 2768-mH

**Interface**

According to

MIL-C-39012; MIL-STD-348A/313

**Electrical Data**

Impedance

50 Ω

Frequency

DC to 11 GHz

VSWR (Return Loss)

 ≤ 1.25 ( $\geq 19.08$  dB)

Insertion Loss

 $\leq 0.1 \times \sqrt{f} \text{ (GHz)}$  dB

**Mechanical Data**

Coupling mechanisms

Screw-lock

Weight

0.0113 kg

**Environmental Data**

Temperature range

-65°C to +165°C

RoHS

compliant

**Material And Plating**

Piece Parts (TNC)	Material	Plating
Centre contact	Beryllium Copper	Gold plating(Nickel underplated)
Body	Stainless Steel	Passivated
Insulator	PTFE	
Piece Parts (TNC)	Material	Plating
Centre contact	Beryllium Copper	Gold plating(Nickel underplated)
Body	Stainless Steel	Passivated
Insulator	PTFE	

**Packing**

Single or 100