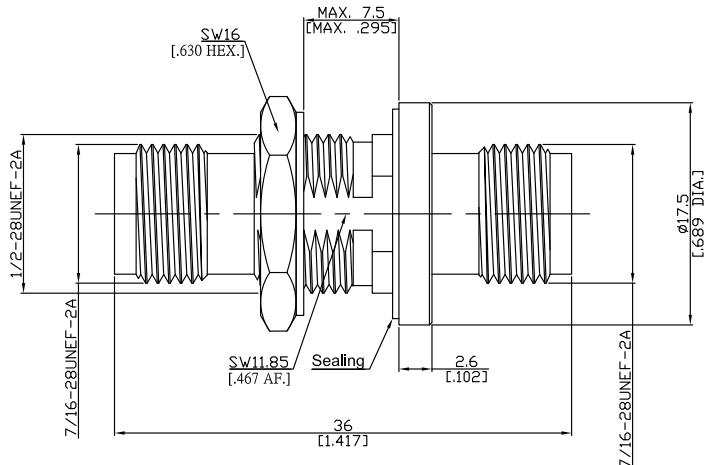
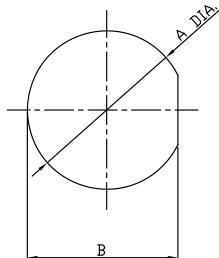


TNC 75 Ohm Jack (Female) to TNC 75 Ohm Jack (Female)
Bulkhead Mount with Sealing Adapter DC-3GHz

AD-T2T27A-BHS-3G / H4-H4

MOUNTING DIMENSIONS


	mm	inch		
	MAX.	MIN.	MAX.	MIN.
A	13.0	12.9	.512	.508
B	12.2	12.1	.480	.476

All dimensions are in mm [inch]

Tolerances according to DIN ISO 2768-mH

Interface

According to

MIL-STD-348B/332

Electrical Data

Impedance	75 Ω
Frequency	DC to 3 GHz
Insulation Resistance	≥ 5 GΩ
Center Contact Resistance	≤ 1.5 mΩ
Outer Contact Resistance	≤ 1 mΩ
Test Voltage	1500 V rms
Working Voltage (at sea level)	500 V rms
Power Handling	≤ 80 W @ 2 GHz

Material And Plating

Piece Parts (TNC 75 Ohm)	Material	Plating
Centre Contact	Phosphor Bronze	Gold plating, 3 µinch (Non-magnetic nickel-phosphorus underplating, 80 µinch)
Body	Brass	Copper-Tin-Zinc Alloy
Insulator	PTFE	
Gasket	Silicone Rubber	
Fastening Nut	Brass	Copper-Tin-Zinc Alloy
Washer	Brass	Copper-Tin-Zinc Alloy
Piece Parts (TNC 75 Ohm)	Material	Plating
Centre Contact	Phosphor Bronze	Gold plating, 3 µinch (Non-magnetic nickel-phosphorus underplating, 80 µinch)
Body	Brass	Copper-Tin-Zinc Alloy
Insulator	PTFE	

TNC 75 Ohm Jack (Female) to TNC 75 Ohm Jack (Female)
Bulkhead Mount with Sealing Adapter DC-3GHz

AD-T2T27A-BHS-3G / H4-H4

Mechanical Data

Coupling mechanisms	Screw-lock
Mating Cycles	≥ 500
Center Contact Captivation: axial	≥ 27 N
Coupling Test Torque	1.7 Nm Max.
Coupling Torque Recommended	0.46 Nm to 0.69 Nm

Environmental Data

Temperature Range	-65°C to +165°C
Thermal shock	MIL-STD-202, Method 107, Condition B
Corrosion	MIL-STD-202, Method 101, Condition B
Vibration	MIL-STD-202, Method 204, Condition D
Shock	MIL-STD-202, Method 213, Condition I
Moisture Resistance	MIL-STD-202, Method 106
RoHS	compliant

Weight

N/A

Packing

Single or 100