


TNC jack (female) / TNC R/P jack (female) Straight Adaptor  
 DC-11 GHz, VSWR  $\leq$  1.25

## AD-T2T75A / H4-H4

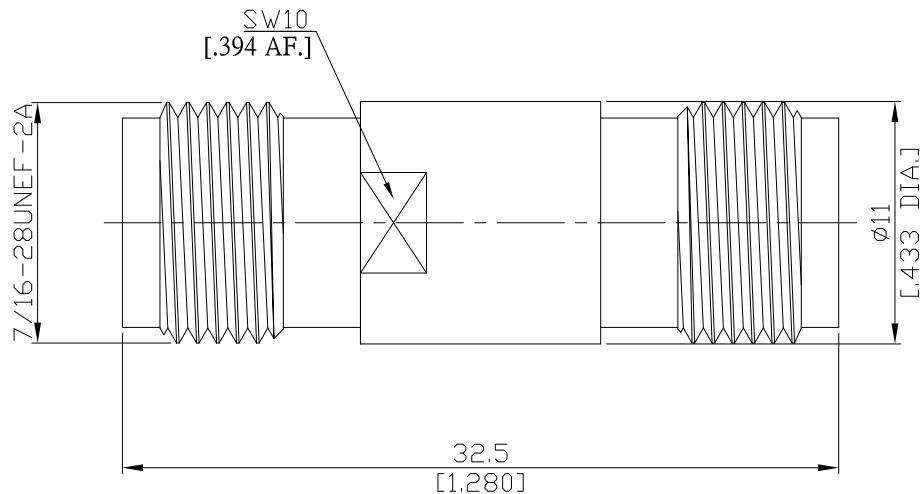

All dimensions are in mm [inch]

Tolerances according to DIN ISO 2768-mH

**Interface**

according to

MIL-C-39012;MIL-STD-348A/313

**Electrical Data**

Impedance	50 $\Omega$
Frequency	DC to 11 GHz
VSWR (Return Loss)	$\leq$ 1.25 ( $\geq$ 19.08 dB)
Insertion Loss	$\leq$ 0.05 $\times$ $\sqrt{F}$ (GHz) dB
Insulation resistance	$\leq$ 5 m $\Omega$
Center contact resistance	$\leq$ 1.5 m $\Omega$
Outer contact resistance	$\leq$ 1 m $\Omega$
Test voltage	1500 V rms
Working voltage	500 V rms
Power handling	$\leq$ 80 W @ 2 GHz

**Material And Plating**

Piece Parts (TNC)	Material	Plating
Centre contact	Phosphor Bronze	Gold plating, 3 $\mu$ inch (Non-magnetic nickel-phosphorus underplating, 80 $\mu$ inch)
Body	Brass	Copper-Tin-Zinc Alloy
Insulator	PTFE	
Piece Parts (TNC)	Material	Plating
Centre contact	Phosphor Bronze	Gold plating, 3 $\mu$ inch (Non-magnetic nickel-phosphorus underplating, 80 $\mu$ inch)
Body	Brass	Copper-Tin-Zinc Alloy
Insulator	PTFE	

TNC jack (female) / TNC R/P jack (female) Straight Adaptor  
DC-11 GHz, VSWR ≤ 1.25

## AD-T2T75A / H4-H4

## Mechanical Data

Coupling mechanisms	Screw-lock
Mating cycles	≥ 500
Center contact captivation: axial	≥ 15 N
Coupling test torque	≤ 1.7 Nm
Recommended torque	0.46 Nm to 0.69 Nm

## Environmental Data

Temperature Range	-65 °C to +155 °C
Thermal shock	MIL-STD-202, Meth. 107, Cond. B
Corrosion	MIL-STD-202, Meth. 101, Cond. B
Vibration	MIL-STD-202, Meth. 204, Cond. B
Shock	MIL-STD-202, Meth. 213, Cond. G
Moisture resistance	MIL-STD-202, Method 106
RoHS	compliant

## Packing

Single or 100