


1.85mm Plug (Male) to 3.5mm Plug (Male) Adapter  
DC-33 GHz VSWR 1.15

**AD-V1PC15A / 1XX-1XX**

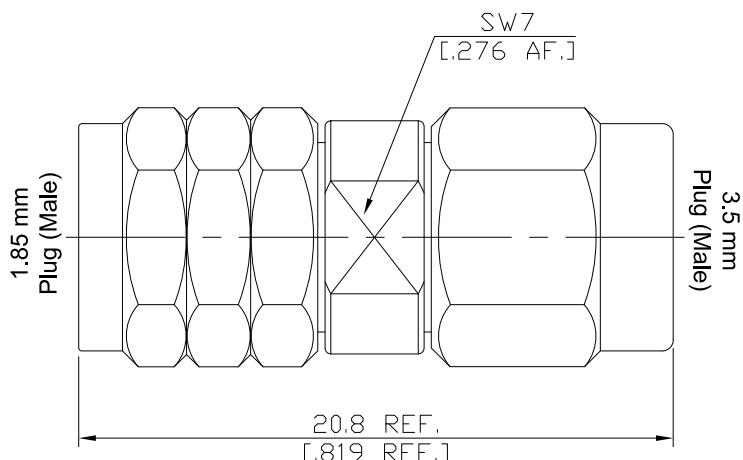

All dimensions are in mm [inch]

Tolerances according to DIN ISO 2768-mH

### Interface

1.85mm According to	IEC 60169-32; IEEE Std 287
Mechanically compatible with	2.4mm
3.5mm according to	IEC 60169-23; IEEE Std 287
Mechanically compatible with	2.92mm, SMA

### Electrical Data

Impedance	50 Ω
Frequency	DC to 33 GHz
VSWR (Return Loss)	≤ 1.15 (≥ 23.13 dB)
Insertion Loss	≤ 0.05 x √F (GHz) dB
Insulation Resistance	≥ 5 GΩ
Test Voltage (at sea level)	500 V rms
Working Voltage (at sea level)	150 V rms
RF Leakage	≥ 100 dB up to 1 GHz

### Material And Plating

Piece Parts (1.85mm)	Material	Plating
Centre Contact	Brass	Gold plating (Non-magnetic nickel-phosphorus underplating)
Body	Stainless Steel	Passivated
Insulator	PEI	
Gasket	Silicone Rubber	
Coupling Nut	Stainless Steel	Passivated
Piece Parts (3.5mm)	Material	Plating
Centre Contact	Brass	Gold plating (Non-magnetic nickel-phosphorus underplating)
Body	Stainless Steel	Passivated
Insulator	PEI	
Gasket	Silicone Rubber	
Coupling Nut	Stainless Steel	Passivated



1.85mm Plug (Male) to 3.5mm Plug (Male) Adapter  
DC-33 GHz VSWR 1.15

**AD-V1PC15A / 1XX-1XX**

**Mechanical Data**

Coupling mechanisms	1.85mm Side	3.5mm Side
Mating Cycles	Screw-lock	Screw-lock
Center Contact Captivation	≥ 500	≥ 500
Coupling Test Torque	≥ 20 N	≥ 20 N
Recommended Torque	1.65 Nm max.	1.70 Nm max.
	0.80 Nm to 1.10 Nm	0.80 Nm to 1.10 Nm

**Environmental Data**

Temperature Range	-55°C to +165°C
Thermal shock	MIL-STD-202, Method 107, Condition B
Corrosion	MIL-STD-202, Method 101, Condition B
Vibration	MIL-STD-202, Method 204, Condition D
Shock	MIL-STD-202, Method 213, Condition I
Moisture Resistance	MIL-STD-202, Method 106
RoHS	compliant

**Packing**

Standard	Single or 100
----------	---------------