


SMA jack (female) / SMA jack (female) L-Adaptor DC-18 GHz, VSWR ≤ 1.15

## ADL-A2A25C / 91-91

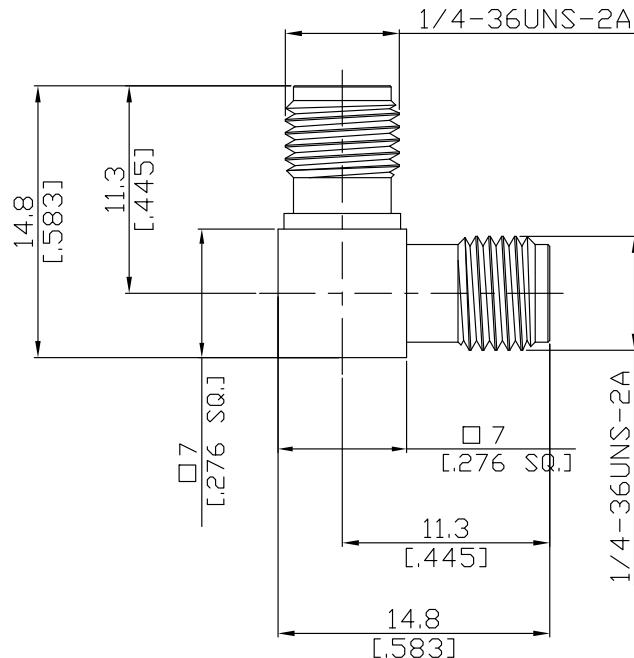

All dimensions are in mm [inch]

Tolerances according to DIN ISO 2768-mH

## Interface

according to

IEC 60169-15; MIL-STD-348B/310

## Electrical Data

Impedance

50 Ω

Frequency

DC to 18 GHz

VSWR (Return Loss)

≤ 1.15 (&gt; 23.1 dB)

Insertion Loss

≤ 0.03 x √F (GHz) dB

Insulation resistance

≥ 5 GΩ

Center contact resistance

≤ 3 mΩ

Outer contact resistance

≤ 2 mΩ

Test voltage

1000 V rms

Working voltage

480 V rms

Power handling (at 20 °C, sea level, VSWR 1.0)

≤ 200 W @ 2 GHz

RF-leakage

≥ 100 dB up to 1 GHz

## Material And Plating

## Piece Parts (SMA)

## Material

## Plating

Centre contact

Beryllium Copper

Gold plating, 3 µinch

(Non-magnetic nickel-phosphorus underplating, 80 µinch)

Body

Brass

Gold plating, 3 µinch

(Non-magnetic nickel-phosphorus underplating, 80 µinch)

Insulator

PTFE

## Piece Parts (SMA)

## Material

## Plating

Centre contact

Beryllium Copper

Gold plating, 3 µinch

(Non-magnetic nickel-phosphorus underplating, 80 µinch)

Body

Brass

Gold plating, 3 µinch

(Non-magnetic nickel-phosphorus underplating, 80 µinch)

Insulator

PTFE

SMA jack (female) / SMA jack (female) L-Adaptor DC-18 GHz, VSWR ≤ 1.15

## ADL-A2A25C / 91-91

### Mechanical Data

Coupling mechanisms	Screw-lock
Mating cycles	≥ 500
Center contact captivation: axial	≥ 27 N
radial	≥ 3 Ncm
Coupling test torque	max. 1.7 Nm
Recommended torque	0.8 Nm to 1.1 Nm

### Environmental Data

Temperature Range	-55 °C to +155 °C
Thermal shock	MIL-STD-202, Meth. 107, Cond. B
Corrosion	MIL-STD-202, Meth. 101, Cond. B
Vibration	MIL-STD-202, Meth. 204, Cond. D
Shock	MIL-STD-202, Meth. 213, Cond. I
Moisture resistance	MIL-STD-202, Meth. 106
RoHS	compliant

### Packing

Single or 100