



 L-adaptor plug/plug
 BNC plug (male) / BNC plug (male)

ADL-B1B25A/144-144

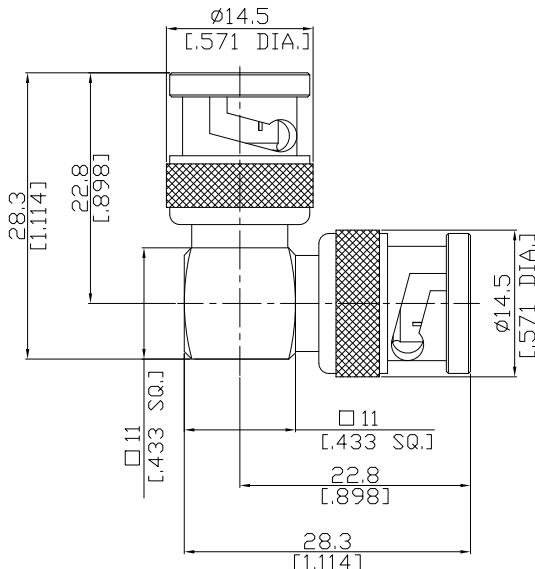

All dimensions are in mm [inch]

Tolerances according to DIN ISO 2768-mH

Interface

According to

IEC 60169-8; MIL-C-39012; MIL-STD-348A/301

Electrical Data

Impedance 50 Ω

Frequency DC to 4 GHz

 VSWR (Return Loss) ≤ 1.25 (≥ 19.1 dB)

 Insertion Loss $\leq 0.05 \times \sqrt{f}$ (GHz) dB

Mechanical Data

Coupling mechanisms Bayonet-lock

Weight 0.0181 kg

Environmental Data

Temperature range -65°C to +165°C

RoHS compliant

Material And Plating

Piece Parts (BNC)	Material	Plating
Centre contact	Brass	Gold plating(Nickel underplated)
Body	Brass	Copper-Tin-Zinc Alloy
Insulator	PTFE	
Gasket	Silicone Rubber	
Coupling nut	Brass	Copper-Tin-Zinc Alloy
Piece Parts (BNC)	Material	Plating
Centre contact	Brass	Gold plating(Nickel underplated)
Body	Brass	Copper-Tin-Zinc Alloy
Insulator	PTFE	
Gasket	Silicone Rubber	
Coupling nut	Brass	Copper-Tin-Zinc Alloy

Packing

Single or 100