


F plug (male) / F jack (female) L-adaptor, 75 Ohm DC-1 GHz

ADL-F1F27A / 133-13

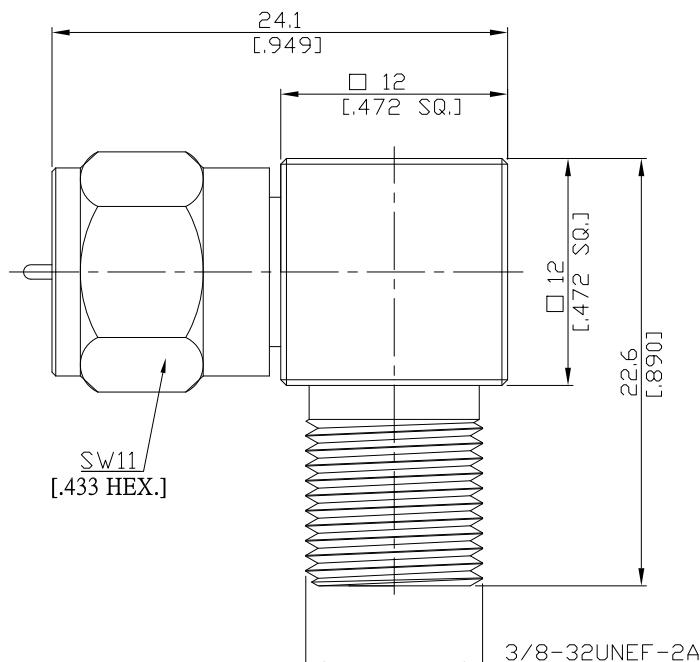

All dimensions are in mm [inch]

Tolerances according to DIN ISO 2768-mH

Interface

according to

IEC 60169-24

Electrical Data

Impedance

75 Ω

Frequency

DC to 1 GHz

Mechanical Data

Coupling mechanisms

Screw-lock

Mating cycles

≥ 500

Environmental Data

Temperature Range

-40°C to + 60°C

RoHS

compliant

Material And Plating**Piece Parts (F)****Material****Plating**

Centre contact

Brass

Gold plating, 3 µinch

(Non-magnetic nickel-phosphorus underplating, 80 µinch)

Nickel

Body

Brass

Insulator

PTFE

Coupling nut

Brass

Nickel

Piece Parts (F)**Material****Plating**

Centre contact

Brass

Gold plating, 3 µinch

(Non-magnetic nickel-phosphorus underplating, 80 µinch)

Nickel

Body

Brass

Insulator

PTFE

Packing

Single or 100