


N plug (male) / TNC plug (male) L-adaptor DC-10 GHz VSWR ≤ 1.50

ADL-N1T15A / 9XX-9XX

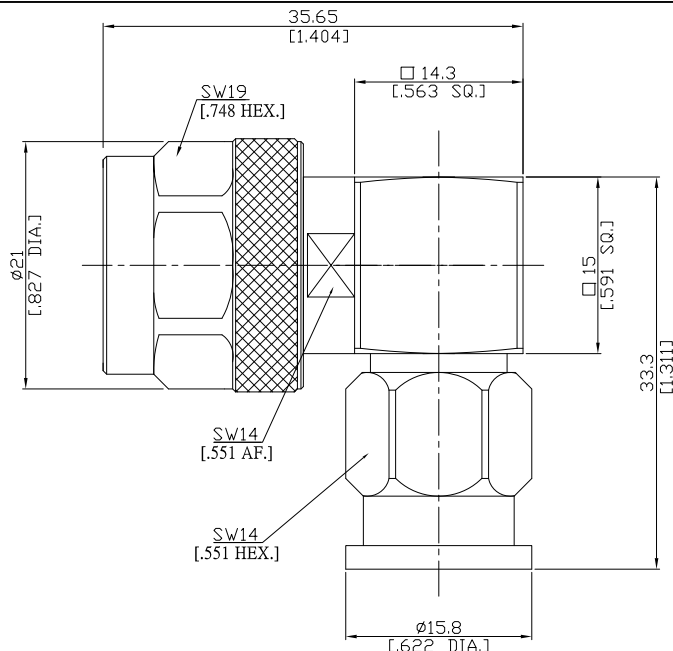

All dimensions are in mm [inch]

Tolerances according to DIN ISO 2768-mH

Interface

N according to

IEC 61169-8; MIL-STD-348B/301

TNC according to

IEC 60169-17; MIL-STD-348B/313

Electrical Data

Impedance

50 Ω

Frequency

DC to 10 GHz

VSWR (Return Loss)

≤ 1.50 (≥ 14 dB)

Insertion loss

≤ 0.05 x √F (GHz) dB

Insulation resistance

≥ 5 GΩ

Center contact resistance

≤ 1 mΩ, N side;

≤ 1.5 mΩ, TNC side

Outer contact resistance

≤ 0.25 mΩ, N side;

≤ 1 mΩ, TNC side

Working voltage

500 V rms

Power handling (at 20 °C, sea level, VSWR 1.0)

≤ 80 W @ 2 GHz

Material And Plating

Piece Parts (N)	Material	Plating
Centre contact	Beryllium Copper	Gold plating, 3 μinch (Non-magnetic nickel-phosphorus underplating, 80 μinch)
Body	Stainless Steel	Passivated
Insulator	PTFE	
Gasket	Silicone Rubber	
Coupling nut	Stainless Steel	Passivated
Piece Parts (TNC)	Material	Plating
Centre contact	Beryllium Copper	Gold plating, 3 μinch (Non-magnetic nickel-phosphorus underplating, 80 μinch)
Body	Stainless Steel	Passivated
Insulator	PTFE	
Gasket	Silicone Rubber	
Coupling nut	Stainless Steel	Passivated

The facts and figures herein are carefully compiled to the best of our knowledge, but they are intended for general informational purposes only. In the effort to improve our products, we reserve the right to make changes judged to be necessary.

Rev.:
Date:
JUL/16/2021

Rosnol RF/Microwave Technology Co., Ltd.
www.rosnol.com; info@rosnol.com
Phone: +886-3-463-5095 / Fax: +886-3-463-5952
N-CAGE Code: SFKK0 / ISO9001 Certified

Page
1/2

N plug (male) / TNC plug (male) L-adaptor DC-10 GHz VSWR ≤ 1.50

ADL-N1T15A / 9XX-9XX

Mechanical Data

	N side	TNC side
Coupling mechanisms	Screw-lock	Screw-lock
Mating cycles	min. 500	min. 500
Center contact captivation: axial	≥ 28 N	N/A
Coupling test torque	max. 1.7 Nm	max. 1.7 Nm
Recommended torque	0.7 Nm to 1.1 Nm	0.46 Nm to 0.69 Nm

Environmental Data

Temperature Range	-55°C to +155°C
Thermal shock	MIL-STD-202, Meth. 107, Cond. B
Corrosion	MIL-STD-202, Meth. 101, Cond. B
Vibration	MIL-STD-202, Meth. 204, Cond. B
Shock	MIL-STD-202, Meth. 213, Cond. I
Moisture resistance	MIL-STD-202, Meth. 106
RoHS	compliant

Packing

Single or 100