




L-adaptor plug/jack
TNC plug (male) / TNC jack (female)

ADL-T1T25A/133-93

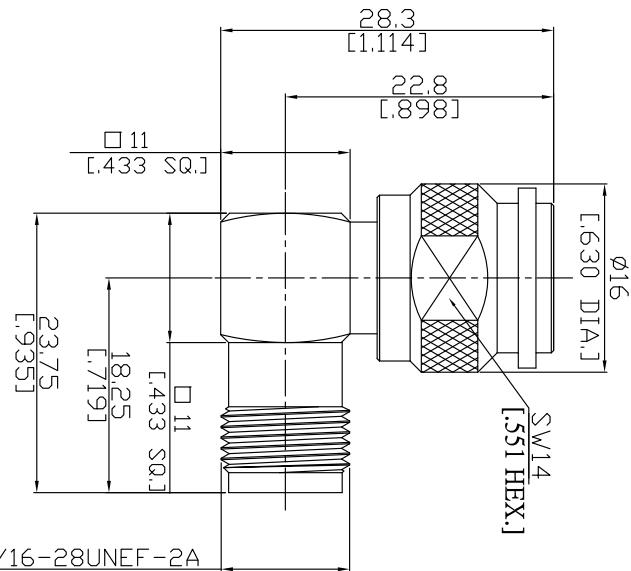

All dimensions are in mm [inch]

Tolerances according to DIN ISO 2768-mH

Interface

According to

IEC 60169-17; MIL-STD-348B/313

Electrical Data

Impedance

50 Ω

Frequency

DC to 11 GHz

VSWR (Return Loss)

≤ 1.25 (≥ 19.1 dB)**Mechanical Data**

Coupling mechanisms

Screw-lock

Weight

N/A

Environmental Data

Temperature range

-65°C to +165°C

RoHS

compliant

Material And Plating**Piece Parts (TNC)**

Centre contact

Material

Brass

Plating

Gold plating(Nickel underplated)

Body

Brass

Nickel

Insulator

PTFE

Gasket

Silicone Rubber

Coupling nut

Brass

Nickel

Piece Parts (TNC)

Centre contact

Material

Beryllium Copper

Plating

Gold plating(Nickel underplated)

Body

Brass

Nickel

Insulator

PTFE

Packing

Single or 100