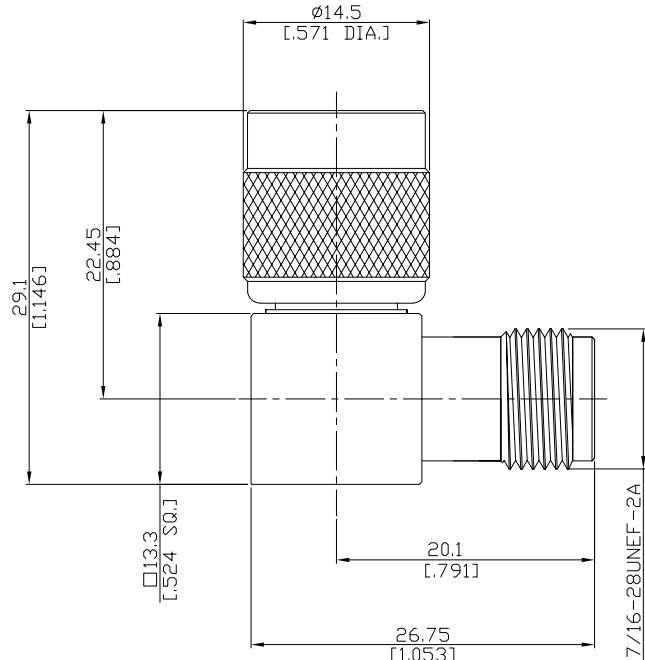



 L-adaptor plug/jack
 TNC plug (male) / TNC jack (female)

ADL-T1T25B/133-93


All dimensions are in mm [inch]

Tolerances according to DIN ISO 2768-mH

Interface

According to IEC 60169-17; MIL-STD-348B/313

Electrical Data

 Impedance 50 Ω
 Frequency DC to 6 GHz

Mechanical Data

 Coupling mechanisms Screw-lock
 Weight N/A

Environmental Data

 Temperature range -65°C to +165°C
 RoHS compliant

Material And Plating

Piece Parts (TNC)	Material	Plating
Centre contact	Brass	Gold plating(Nickel underplated)
Body	Brass	Nickel
Insulator	PTFE	
Gasket	Silicone Rubber	
Coupling nut	Brass	Nickel
Piece Parts (TNC)	Material	Plating
Centre contact	Beryllium Copper	Gold plating(Nickel underplated)
Body	Brass	Nickel
Insulator	PTFE	

Packing

Single or 100