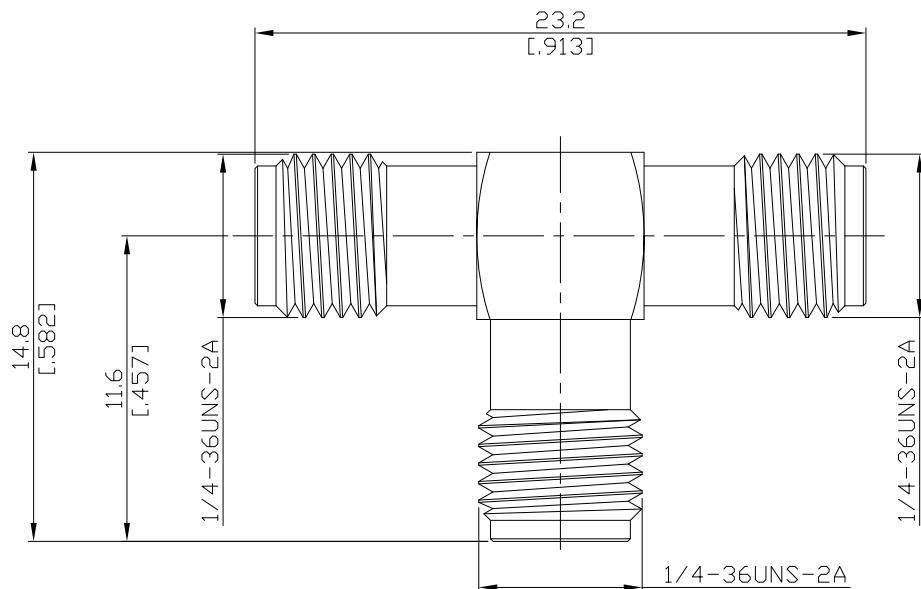


SMA jack (female) / SMA jack (female) / SMA jack (female)  
 T-Adaptor 3 jacks DC-12.4 GHz

**ADT-A2A2A25A / H3-H3-H3**


All dimensions are in mm [inch]

Tolerances according to DIN ISO 2768-mH

**Interface**

according to

IEC 60169-15; MIL-STD-348B/310

**Electrical Data**

Impedance	50 Ω
Frequency	DC to 12.4 GHz
Insulation resistance	≤ 5 mΩ
Center contact resistance	≤ 3 mΩ
Outer contact resistance	≤ 2 mΩ
Test voltage	1000 V rms
Working voltage	480 V rms
Power handling	≤ 200 W @ 2 GHz
RF-leakage	≥ 100 dB up to 1 GHz

**Material And Plating**

Piece Parts (SMA)	Material	Plating
Centre contact	Phosphor Bronze	Gold plating, Nickel underplated
Body	Brass	Nickel
Insulator	PTFE	
Piece Parts (SMA)	Material	Plating
Centre contact	Phosphor Bronze	Gold plating, Nickel underplated
Body	Brass	Nickel
Insulator	PTFE	
Piece Parts (SMA)	Material	Plating
Centre contact	Phosphor Bronze	Gold plating, Nickel underplated
Body	Brass	Nickel
Insulator	PTFE	

SMA jack (female) / SMA jack (female) / SMA jack (female)  
T-Adaptor 3 jacks DC-12.4 GHz

## ADT-A2A2A25A / H3-H3-H3

## Mechanical Data

## Recommended for Environmental Data

Environmental Durability	Test Standard
Temperature Range	-65 °C to +155 °C
Thermal shock	MIL-STD-202, Meth. 107, Cond. B
Corrosion	MIL-STD-202, Meth. 101, Cond. B
Vibration	MIL-STD-202, Meth. 204, Cond. D
Shock	MIL-STD-202, Meth. 213, Cond. I
Moisture resistance	MIL-STD-202, Meth. 106
RoHS	compliant

## Packing

Single or 100