


T-Adaptor 1 plug, 2 jacks  
TNC plug (male) / TNC jack (female)

ADT-T2T1T25A/H1-111-H1

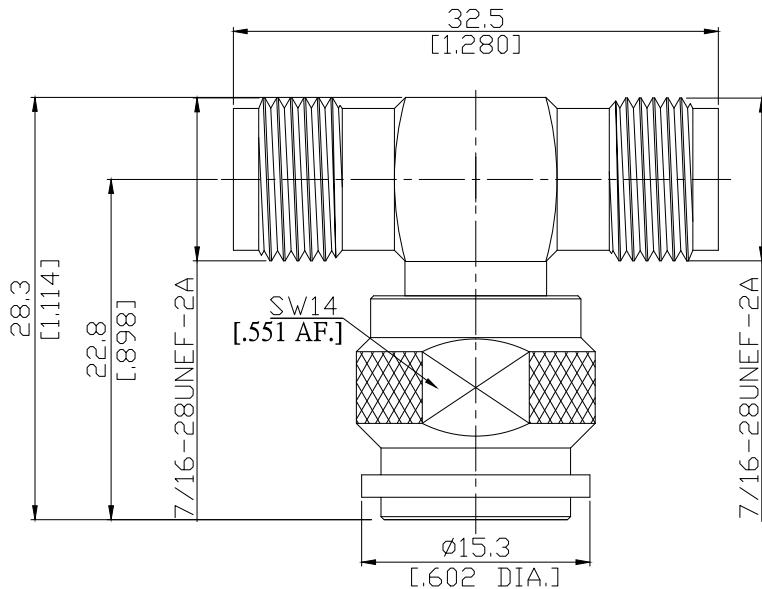

All dimensions are in mm [inch]

Tolerances according to DIN ISO 2768-mH

#### Interface

According to IEC 60169-17; MIL-STD-348B/313

#### Electrical Data

Impedance 50 Ω

#### Mechanical Data

Coupling mechanisms Screw-lock

Weight N/A

#### Environmental Data

Temperature range -65°C to +165°C

RoHS compliant

#### Material And Plating

Piece Parts (TNC male)	Material	Plating
Centre contact	Brass	Gold plating(Nickel underplated)
Body	Brass	Gold plating(Nickel underplated)
Insulator	PTFE	
Gasket	Silicone Rubber	
Coupling nut	Brass	Gold plating(Nickel underplated)
Piece Parts (TNC female)	Material	Plating
Centre contact	Phosphor Bronze	Gold plating(Nickel underplated)
Body	Brass	Gold plating(Nickel underplated)
Insulator	PTFE	

#### Packing

Single or 100