


N Plug (Male) to N Plug (Male) U-Link Adapter DC-11GHz

ADU-N1N15A/800-800

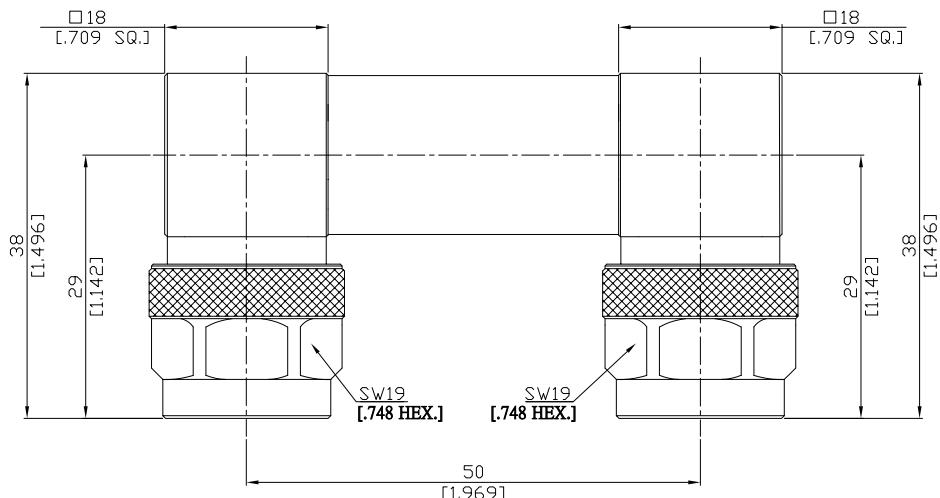

All dimensions are in mm [inch]

Tolerances according to DIN ISO 2768-mH

Interface

According to

IEC 61169-16; MIL-STD-348B/304

Electrical Data

Impedance	50 Ω
Frequency	DC to 11 GHz
Insulation Resistance	≥ 5 GΩ
Center Contact Resistance	≤ 1.0 mΩ
Working Voltage (at sea level)	500 V rms

Material And Plating

Piece Parts (N)	Material	Plating
Centre Contact	Beryllium Copper	Silver plating
Body	Brass	Silver plating
Insulator	PTFE	
Gasket	Silicone Rubber	
Coupling Nut	Brass	Silver plating
Piece Parts (N)	Material	Plating
Centre Contact	Beryllium Copper	Silver plating
Body	Brass	Silver plating
Insulator	PTFE	
Gasket	Silicone Rubber	
Coupling Nut	Brass	Silver plating

N Plug (Male) to N Plug (Male) U-Link Adapter
DC-11GHz

ADU-N1N15A/800-800

Mechanical Data

Coupling mechanisms	Screw-lock
Mating Cycles	≥ 500
Weight	N/A
Recommended Torque	1.35 Nm

Environmental Data

Temperature Range	-65°C to +165°C
RoHS	compliant

Packing

Single or 100