


Non-Magnetic N Plug (Male) / N Plug (Male) Straight Adapter,  
DC-11 GHz, VSWR 1.15

**NMAD-N1N15A / 144-144**

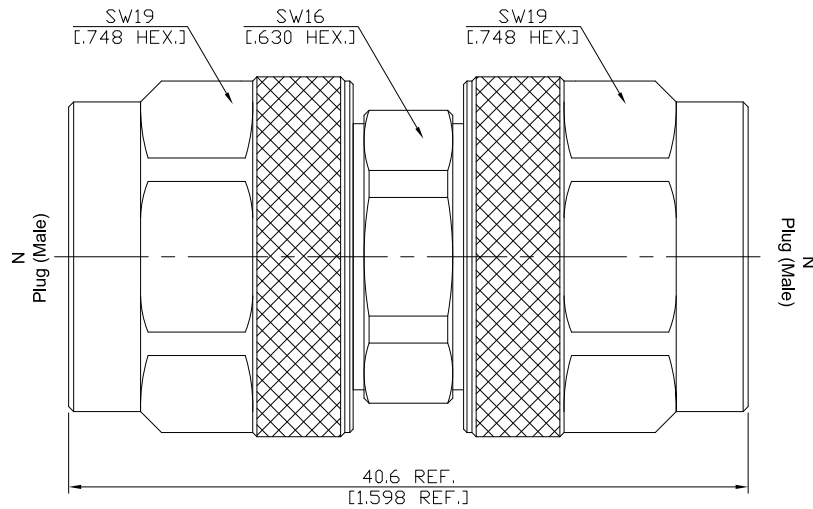

All dimensions are in mm [inch]

Tolerances according to DIN ISO 2768-mH

**Interface**

According to

IEC 60169-16; MIL-STD-348B/304; CECC 22210; MIL-PRF-39012

**Electrical Data**

Impedance	50 Ω	
Frequency	DC to 11 GHz	
Insertion Loss	≤ 1.15 (≥ 23.13 dB)	
Insertion loss	≤ 0.1 x √F (GHz) dB	
Insulation resistance	≥ 5 GΩ	
Center contact resistance	≤ 1 mΩ	
Outer contact resistance	≤ 0.25 mΩ	
Working voltage	500 V rms	
Power handling	1000 W @ 1 GHz	700 W @ 2 GHz
RF leakage	≥ 128 dB @ DC to 1 GHz	

**Material And Plating**

Piece Parts (N)	Material	Plating
Centre contact	Brass	Gold plating (Non-magnetic nickel-phosphorus underplating)
Body	Brass	Copper-Tin-Zinc Alloy
Insulator	PTFE	
Gasket	Silicone Rubber	
Coupling nut	Brass	Copper-Tin-Zinc Alloy
Piece Parts (N)	Material	Plating
Centre contact	Brass	Gold plating (Non-magnetic nickel-phosphorus underplating)
Body	Brass	Copper-Tin-Zinc Alloy
Insulator	PTFE	
Gasket	Silicone Rubber	
Coupling nut	Brass	Copper-Tin-Zinc Alloy

Non-Magnetic N Plug (Male) / N Plug (Male) Straight Adapter,  
DC-11 GHz, VSWR 1.15

**NMAD-N1N15A / 144-144**

**Mechanical Data**

Coupling Mechanisms	Screw-lock
Mating Cycles	≥ 500
Coupling nut retention	≥ 450 N
Center contact captivation: axial	≥ 28 N
Coupling test torque	max. 1.7 Nm
Recommended torque	1.0 Nm

**Environmental Data**

Temperature Range	-65°C to +165°C
Thermal shock	MIL-STD-202, Method 107, Condition B
Corrosion	MIL-STD-202, Method 101, Condition B
Vibration	MIL-STD-202, Method 204, Condition B
Shock	MIL-STD-202, Method 213, Condition I
Moisture resistance	MIL-STD-202, Method 106
RoHS	compliant

**Packing**

Single or 100