


Non-Magnetic N Jack (Female) / N Jack (Female) Straight Adapter,
DC-12.4 GHz, VSWR 1.30

NMAD-N2N25A / 94-94

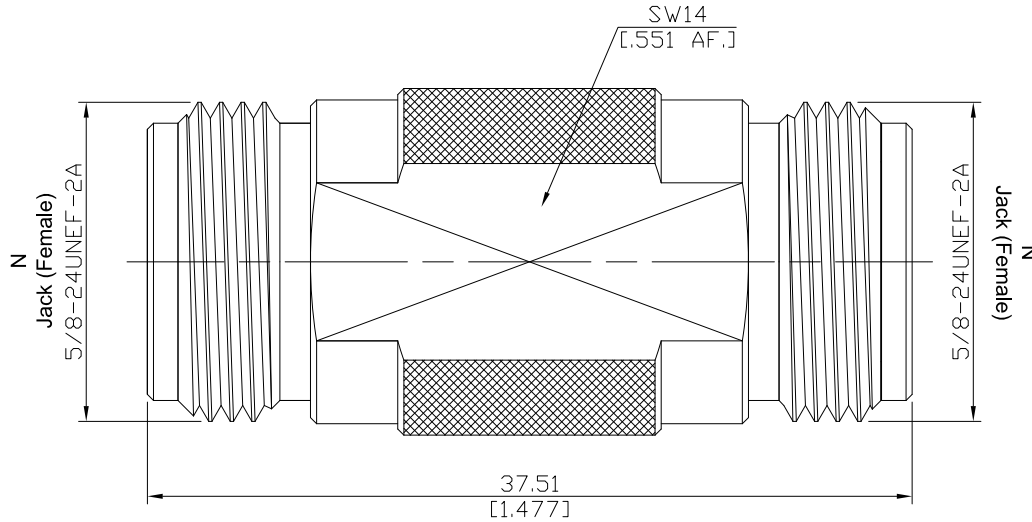

All dimensions are in mm [inch]

Tolerances according to DIN ISO 2768-mH

Interface

According to

IEC 60169-16; MIL-STD-348B/304; CECC 22210; MIL-PRF-39012

Electrical Data

Impedance	50 Ω	
Frequency	DC to 12.4 GHz	
Insertion Loss	≤ 1.3 (≥ 17.69 dB)	
Insertion loss	≤ 0.05 x √F (GHz) dB	
Insulation resistance	≥ 5 GΩ	
Center contact resistance	≤ 1 mΩ	
Outer contact resistance	≤ 0.25 mΩ	
Working voltage	500 V rms	
Power handling	1000 W @ 1 GHz	700 W @ 2 GHz
RF leakage	≥ 128 dB @ DC to 1 GHz	

Material And Plating

Piece Parts (N)	Material	Plating
Centre contact	Beryllium Copper	Gold plating (Non-magnetic nickel-phosphorus underplating)
Body	Brass	Copper-Tin-Zinc Alloy
Insulator	PTFE	
Piece Parts (N)	Material	Plating
Centre contact	Beryllium Copper	Gold plating (Non-magnetic nickel-phosphorus underplating)
Body	Brass	Copper-Tin-Zinc Alloy
Insulator	PTFE	

Non-Magnetic N Jack (Female) / N Jack (Female) Straight Adapter,
DC-12.4 GHz, VSWR 1.30

NMAD-N2N25A / 94-94

Mechanical Data

Coupling Mechanisms	Screw-lock
Mating Cycles	min. 500
Center contact captivation: axial	≥ 28 N
Coupling test torque	max. 1.7 Nm
Recommended torque	1.0 Nm

Environmental Data

Temperature Range	-65°C to +165°C
Thermal shock	MIL-STD-202, Method 107, Condition B
Corrosion	MIL-STD-202, Method 101, Condition B
Vibration	MIL-STD-202, Method 204, Condition B
Shock	MIL-STD-202, Method 213, Condition I
Moisture resistance	MIL-STD-202, Method 106
RoHS	compliant

Packing

Single or 100