


# SMA plug (male) / SMA plug (male) Straight Adaptor With Venting Hole For TVAC Application DC-18 GHz, VSWR $\leq$ 1.20

## TVAC-AD-A1A15A / 9XX-9XX

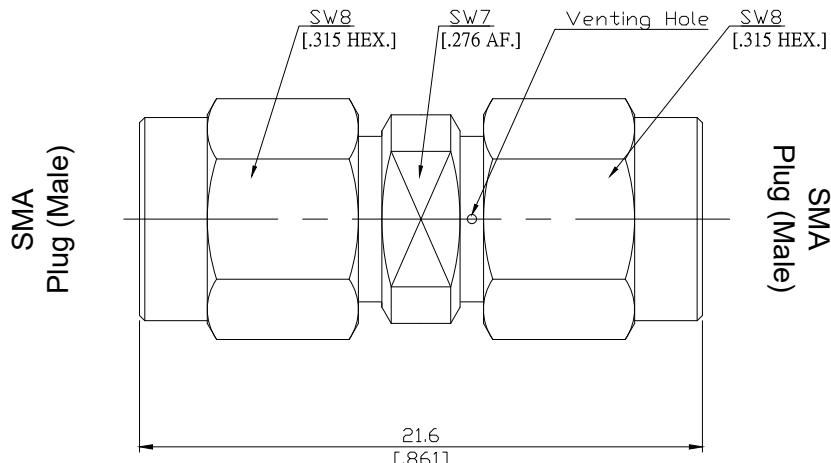

All dimensions are in mm [inch]

Tolerances according to DIN ISO 2768-mH

### Interface

according to

IEC 60169-15; MIL-STD-348B/310

### Electrical Data

Impedance	50 $\Omega$
Frequency	DC to 18 GHz
VSWR (Return Loss)	$\leq$ 1.20 ( $\geq$ 20.83 dB)
Insertion Loss	$\leq$ 0.05 $\times$ $\sqrt{F}$ (GHz) dB
Insulation resistance	$\geq$ 5 G $\Omega$
Center contact resistance	$\leq$ 3 m $\Omega$
Outer contact resistance	$\leq$ 2 m $\Omega$
Test voltage	1000 V rms
Working voltage	480 V rms
Power handling	$\leq$ 200 W @ 2 GHz
RF-leakage	$\geq$ 100 dB up to 1 GHz

### Material And Plating

Piece Parts (SMA)	Material	Plating
Centre contact	Beryllium Copper	Gold plating, 3 pinch (Non-magnetic nickel-phosphorus underplating, 80 $\mu$ inch)
Body	Stainless Steel	Passivated
Insulator	PTFE	
Gasket	Silicone Rubber	
Coupling nut	Stainless Steel	Passivated
Piece Parts (SMA)	Material	Plating
Centre contact	Beryllium Copper	Gold plating, 3 pinch (Non-magnetic nickel-phosphorus underplating, 80 $\mu$ inch)
Body	Stainless Steel	Passivated
Insulator	PTFE	
Gasket	Silicone Rubber	
Coupling nut	Stainless Steel	Passivated

**SMA pulg (male) / SMA pulg (male) Straight Adaptor With Venting Hole For TVAC Application DC-18 GHz, VSWR ≤ 1.20****TVAC-AD-A1A15A / 9XX-9XX****Mechanical Data**

Coupling mechanisms	Screw-lock
Mating cycles	≥ 500
Center contact captivation: axial	≥ 27 N
radial	≥ 3 Ncm
Coupling test torque	≤ 1.7 Nm
Recommended torque	0.8 Nm to 1.1 Nm

**Environmental Data**

Temperature Range	-65 °C to +155 °C
Thermal shock	MIL-STD-202, Method 107, Condition B
Corrosion	MIL-STD-202, Method 101, Condition B
Vibration	MIL-STD-202, Method 204, Condition D
Shock	MIL-STD-202, Method 213, Condition I
Moisture resistance	MIL-STD-202, Method 106
RoHS	compliant

**Packing**

Single or 100