


TVAC 2.4mm Jack (Female) to 2.92mm Jack (Female) Straight Adapter,  
DC-40 GHz, VSWR 1.25

**VH-AD-Q2K25A / 9X-9X**

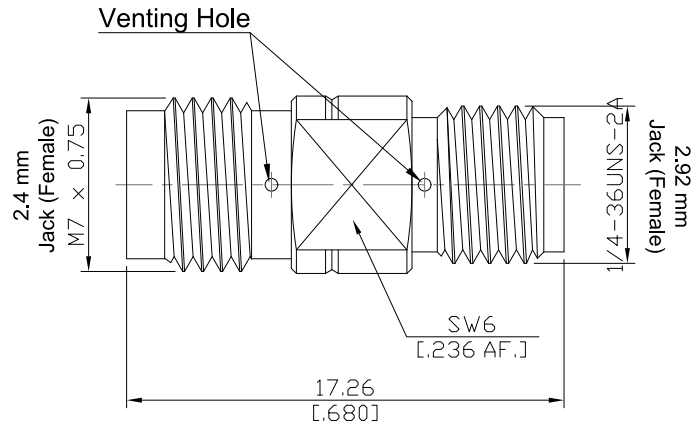

All dimensions are in mm [inch]  
Tolerances according to DIN ISO 2768-mH

**Interface**

Mechanically compatible with  
According to

2.4mm Side  
1.85mm  
IEC 61169-40, IEEE Std 287

2.92mm Side  
3.5mm and SMA  
IEC 61169-35, IEEE Std 287

**Electrical Data**

Impedance 50 Ω  
Frequency DC to 40 GHz  
VSWR (Return Loss) ≤ 1.25 (≥ 19.08 dB)  
Insertion Loss ≤ 0.05 x √F (GHz) dB  
Insulation Resistance ≥ 5 GΩ  
Test Voltage (at sea level) 500 V rms  
Working Voltage (at sea level) 150 V rms  
RF Leakage ≥ 100 dB up to 1 GHz  
Power Handling 18W

-Vacuum Vented Construction for Thermal Vacuum Applications-

**Material And Plating**

Piece Parts (2.4mm)	Material	Plating
Centre Contact	Beryllium Copper	Gold plating (Non-magnetic nickel-phosphorus underplating)
Body	Stainless Steel	Passivated
Insulator	PEI	
Piece Parts (2.92mm)	Material	Plating
Centre Contact	Beryllium Copper	Gold plating (Non-magnetic nickel-phosphorus underplating)
Body	Stainless Steel	Passivated
Insulator	PEI	

TVAC 2.4mm Jack (Female) to 2.92mm Jack (Female) Straight Adapter,  
DC-40 GHz, VSWR 1.25

**VH-AD-Q2K25A / 9X-9X**

**Mechanical Data**

	2.4mm Side	2.92mm Side
Coupling mechanisms	Screw-On	Screw-On
Mating Cycles	≥ 500	≥ 500
Center Contact Captivation	≥ 20 N	≥ 20 N
Coupling Test Torque	1.65 Nm max.	1.70 Nm max.
Recommended Torque	0.80 Nm to 1.10 Nm	0.80 Nm to 1.10 Nm

**Environmental Data**

Temperature Range	-65°C to +165°C
Thermal shock	MIL-STD-202, Method 107, Condition B
Corrosion	MIL-STD-202, Method 101, Condition B
Vibration	MIL-STD-202, Method 204, Condition D
Shock	MIL-STD-202, Method 213, Condition I
Moisture Resistance	MIL-STD-202, Method 106
Low outgassing	TML ≤ 1.0%, CVCM ≤ 0.1%
Vacuum Pressure	≤ 1 × 10 <sup>-5</sup> Torr
RoHS	compliant

**Packing**

Standard	Single or 100
----------	---------------