


INFORMATION CONTAINED WITHIN THIS ROSNOL RF/MICROWAVE TECHNOLOGY CORP. DOCUMENT IS CONSIDERED PROPRIETARY AND IS THE PROPERTY OF ROSNOL RF/MICROWAVE TECHNOLOGY CORP.

Rosnol P/N		Length (mm)
43102E50-RSF141-43102E50-800A/6G		800
43102E50-RSF141-43102E50-1000A/6G		1000
Frequency	VSWR Max.	Insertion Loss Max. (dB)
6 GHz	1.25	$\leq 0.001207 \text{ (dB/mm)} * L \text{ (mm)} + 0.15 * \sqrt{f}$

SPECIFICATION CONTROL DRAWING

REVISION

REV.	DESCRIPTION	DATE	APPROVED
-	INITIAL RELEASE	MAY/28/2025	

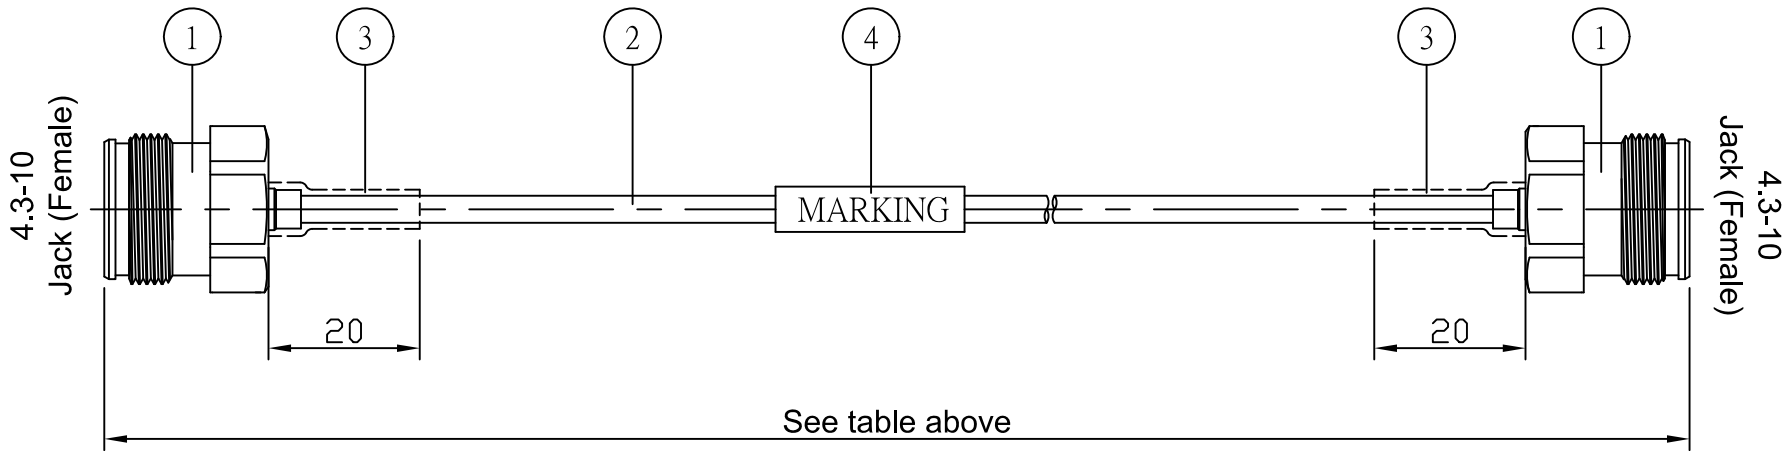

CUSTOMER'S APPROVAL

Department or
company's stamp

Name:

Date:

Copy and send back to
ROSNOL CORPORATION BEFORE:

NOTES:

- CONNECTORS ASSEMBLED PER MANUFACTURERS INSTRUCTIONS.
- MARKING DETAILS IF NOT SPECIAL MARKING TEXT:
ROSNOL DC- 6 GHz
43102E50-RSF141-43102E50-XXX/6G
WW/YY - SERIAL NUMBER
- ALL DIMENSIONS ARE IN MM ; LENGTH TOLERANCES :
 $\pm 3 \text{ mm}$ FOR $L \leq 300 \text{ mm}$; $\pm 1\%$ FOR $L > 300 \text{ mm}$

4	LABEL HEAT SHRINK TUBE	HST-W-D4-125C	1	EA	DIMENSION ARE IN MM [INCH]	CUSTOMER	REV —	UNIT mm [inch]
3	HEAT SHRINK TUBE	HST-B-D6-125C	2X 20	mm	TOLERANCES DECIMALS .X ± 6.35 [.250"] .XX ± 3.18 [.125"] .XXX ± 1.52 [.060"] DEGREES X° ± 1°	APPROVED DATE		
2	CABLE	ROSNOL RSF141	See table above	mm				
1	4.3-10 SOLDER JACK	43102E50-0141A/94	2	EA		DRAWN DATE		
NO.	DESCRIPTION	PARTS NO.	QTY.	U/M				

ROSNOL 

RF/Microwave Technology
www.rosnol.com
info@rosnol.com
N-CAGE Code: SFKK0

TITLE
4.3-10 Jack (Female) to 4.3-10 Jack (Female)
XXX Meter Cable Assembly for **RSF141** Cable

DRAWING NO.
43102E50-RSF141-43102E50-XXX/6G