
INFORMATION CONTAINED WITHIN THIS ROSNOL RF/MICROWAVE TECHNOLOGY CORP. DOCUMENT IS CONSIDERED PROPRIETARY AND IS THE PROPERTY OF ROSNOL RF/MICROWAVE TECHNOLOGY CORP.

# SPECIFICATION CONTROL DRAWING

| REVISION | | | |
|---|---|---|---|
| REV. | DESCRIPTION | DATE | APPROVED |
| – | INITIAL RELEASE | JAN/22/2024 | |

| Rosnol P/N | | Length (mm) |
|---|---|---|
| A1E50-EF402-A1E50-750A/ 18G | | 750 |
| A1E50-EF402-A1E50-1000A/ 18G | | 1000 |
| A1E50-EF402-A1E50-1500A/ 18G | | 1500 |
| **Frequency** | **VSWR Max.** | **Insertion Loss Max.** |
| 18 GHz | 1.25 | ≤ 0.00227 (dB/mm) * L (mm) + 0.1 (dB) |

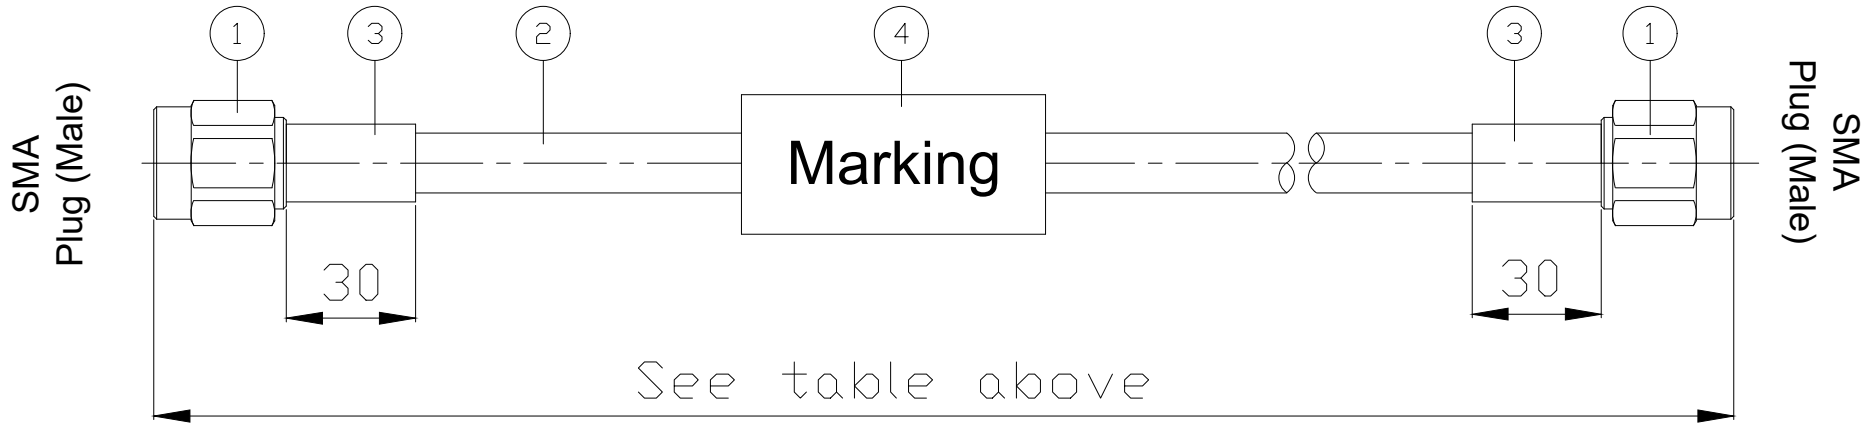


NOTES:
1) CONNECTORS ASSEMBLED PER MANUFACTURERS INSTRUCTIONS.
2) MARKING DETAILS IF NOT SPECIAL MARKING TEXT:
ROSNOL DC-18 GHz
A1E50-EF402-A1E50-XXXA/18G

| NO. | DESCRIPTION | PARTS NO. | QTY. | U/M |
|---|---|---|---|---|
| 4 | LABEL HEAT SHRINK TUBE | HST-W-D5-125C-G | 1 | EA |
| 3 | HEAT SHRINK TUBE | HST-B-D5-125C | 2X 30 | mm |
| 2 | CABLE | ROSNOL EF402A | XXX | mm |
| 1 | SMA SOLDER PLUG | SMA1E50-0141A/91X | 1 | EA |

DIMENSION ARE IN MM [INCH]

TOLERANCES

DECIMALS
.X ± 6.35 [.250"]
.XX ± 3.18 [.125"]
.XXX ± 1.52 [.060"]
DEGREES
X° ± 1°

CUSTOMER | REV – | UNIT mm [inch]

APPROVED | DATE

DRAWN | DATE

ROSNOL
RF/Microwave Technology
www.rosnol.com
info@rosnol.com
N-CAGE Code: SFKK0

TITLE
**SMA Plug (Male) to SMA Plug (Male)**
**XXX Meter Cable Assembly for EF402 Cable**

DRAWING NO.
**A1E50-EF402-A1E50-XXXA/18G**