


INFORMATION CONTAINED WITHIN THIS ROSNOL RF/MICROWAVE TECHNOLOGY CORP. DOCUMENT IS CONSIDERED PROPRIETARY AND IS THE PROPERTY OF ROSNOL RF/MICROWAVE TECHNOLOGY CORP.

Rosnol P/N		Length (mm)
A1K50-MPUL422A-PCN1K50-1500A/18G		1500
Frequency	VSWR Max.	Insertion Loss Max. (dB)
18 GHz	1.25	$\leq 0.00141 \text{ (dB/mm)} * L \text{ (mm)} + 0.15 * \sqrt{f}$

SPECIFICATION CONTROL DRAWING

REVISION

REV.	DESCRIPTION	DATE	APPROVED
-	INITIAL RELEASE	SEP/12/2025	

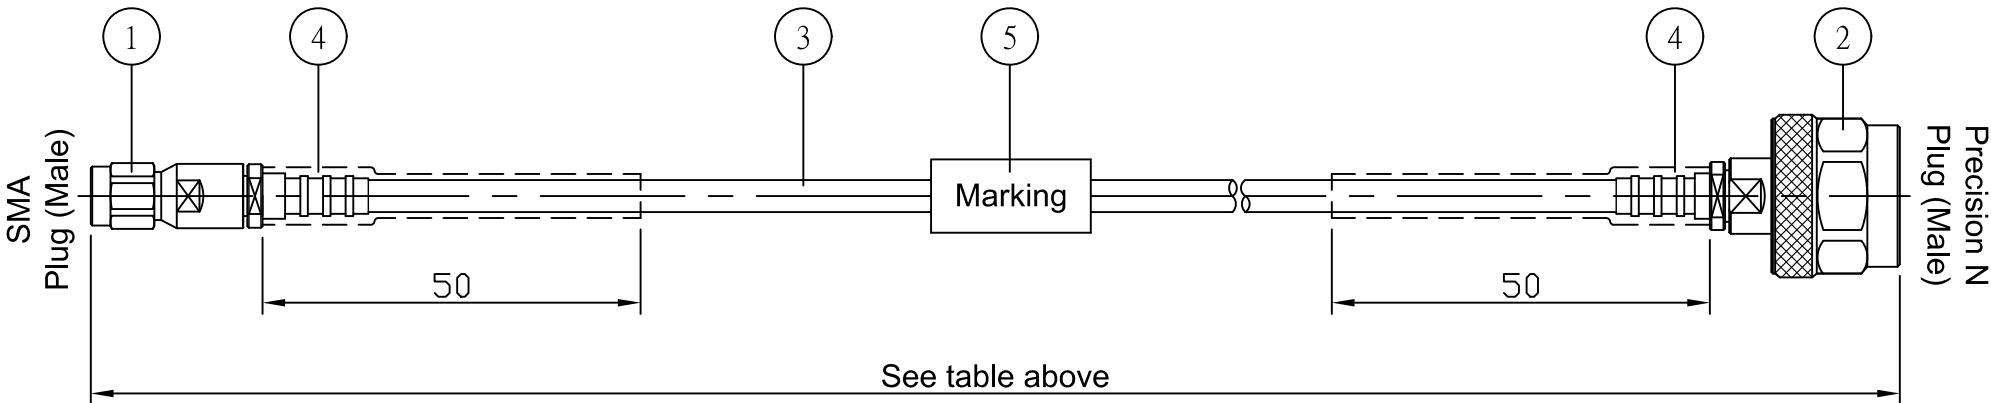

CUSTOMER'S APPROVAL

Department or
company's stamp

Name:

Date:

Copy and send back to
ROSNOL CORPORATION BEFORE:

NOTES:

- CONNECTORS ASSEMBLED PER MANUFACTURERS INSTRUCTIONS.
- MARKING DETAILS IF NOT SPECIAL MARKING TEXT:
ROSNOL DC- 18 GHz
A1K50-MPUL422A-PCN1K50-1500A/18G
WW/YY - SERIAL NUMBER
- ALL DIMENSIONS ARE IN MM ; LENGTH TOLERANCES :
 $\pm 3 \text{ mm}$ FOR $L \leq 300 \text{ mm}$; $\pm 1\%$ FOR $L > 300 \text{ mm}$

5	LABEL HEAT SHRINK TUBE	HST-W-D6-125C	1	EA
4	HEAT SHRINK TUBE	HST-B-D6.4-125C-G	2X 50	mm
3	CABLE	ROSNOL MPUL422A Cable	1500	mm
2	Precision N SOLDER CLAMP PLUG	PCN1K50-MPUL422A/1XX	1	EA
1	SMA SOLDER CLAMP PLUG	SMA1K50-MPUL422A/9XX	1	EA
NO.	DESCRIPTION	PARTS NO.	QTY.	U/M

DIMENSION ARE IN MM [INCH]		CUSTOMER	REV	UNIT
TOLERANCES			-	mm [inch]
DECIMALS		APPROVED	DATE	
.X ± 6.35 [.250"]				
.XX ± 3.18 [.125"]				
.XXX ± 1.52 [.060"]				
DEGREES		DRAWN	DATE	
X° $\pm 1^\circ$				

ROSNOL

RF/Microwave Technology
www.rosnol.com
info@rosnol.com
N-CAGE Code: SFKK0

TITLE
SMA Plug (Male) to Precision N Plug (Male)
1.5 Meter Cable Assembly for MPUL422A Cable

DRAWING NO.
A1K50-MPUL422A-PCN1K50-1500A/18G