
INFORMATION CONTAINED WITHIN THIS ROSNOL RF/MICROWAVE TECHNOLOGY CORP. DOCUMENT IS CONSIDERED PROPRIETARY AND IS THE PROPERTY OF ROSNOL RF/MICROWAVE TECHNOLOGY CORP.

SPECIFICATION CONTROL DRAWING

Rosnol P/N	Length (mm)	Insertion Loss Max. (dB)
A2K50-UF0307-A2K50-1000A/12.4G	1000	≤ 1.85
Frequency : 12.4 GHz	**VSWR Max. : 1.25**	

REVISION			
REV.	DESCRIPTION	DATE	APPROVED
–	INITIAL RELEASE	-	

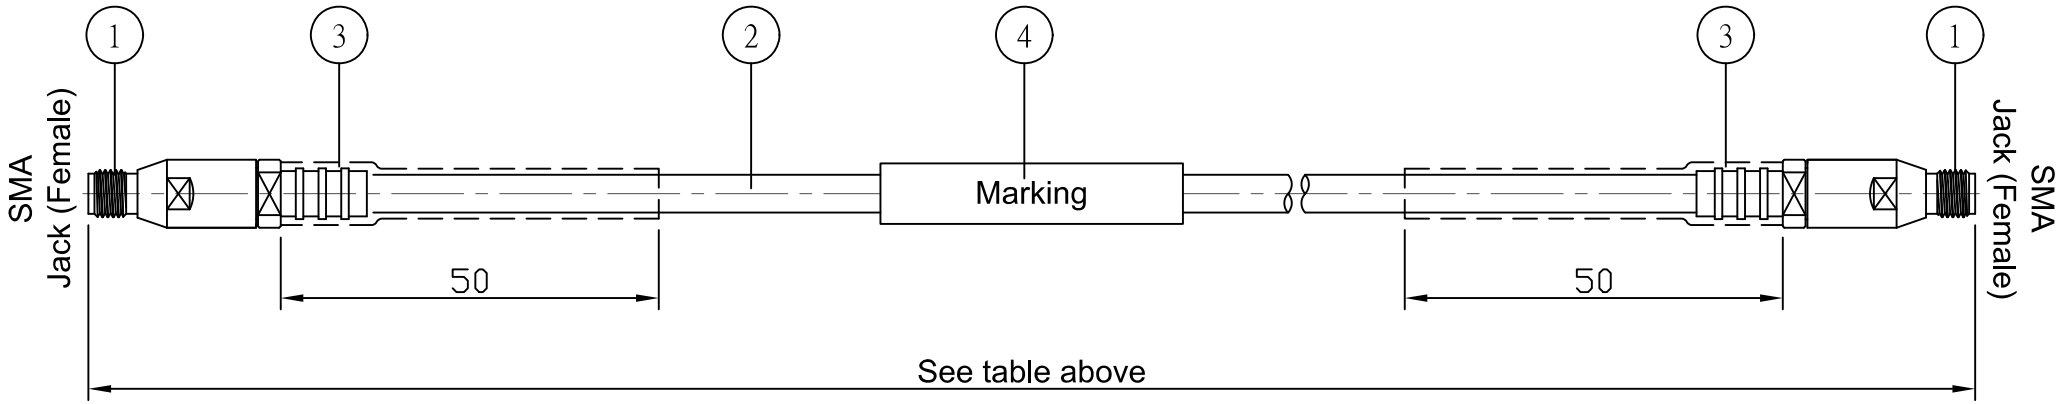

NOTES:
1) CONNECTORS ASSEMBLED PER MANUFACTURERS INSTRUCTIONS.
2) MARKING DETAILS IF NOT SPECIAL MARKING TEXT:
   ROSNOL DC-12.4 GHz
   A2K50-UF0307-A2K50-1000A/12.4G
   WW/YY - SERIAL NUMBER
3) ALL DIMENSIONS ARE IN MM ; LENGTH TOLERANCES :
   ±3 mm FOR L<=300mm ; ±1% FOR L >300mm

CUSTOMER'S APPROVAL

Department or company's stamp

Name:

Date:

Copy and send back to ROSNOL CORPORATION BEFORE:

NO.	DESCRIPTION	PARTS NO.	QTY.	U/M
4	LABEL HEAT SHRINK TUBE	HST-W-D8-125C	1	EA
3	HEAT SHRINK TUBE	HST-B-D6.4-125C-G	2X 50	mm
2	CABLE	ROSNOL UF0307 Cable	1000	mm
1	SMA SOLDER CLAMP JACK	SMA2K50-0307A/9X	2	EA

DIMENSION ARE IN MM [INCH]

TOLERANCES

DECIMALS
.X ± 6.35 [.250"]
.XX ± 3.18 [.125"]
.XXX ± 1.52 [.060"]
DEGREES
X° ± 1°

CUSTOMER	REV	UNIT
-	–	mm [inch]

APPROVED	DATE
–	-

DRAWN	DATE
–	-

ROSNOL
RF/Microwave Technology
www.rosnol.com
info@rosnol.com
N-CAGE Code: SFKK0

TITLE
SMA Jack (Female) to SMA Jack (Female)
1 Meter Cable Assembly for UF0307 Cable

DRAWING NO.
A2K50-UF0307-A2K50-1000A/12.4G