


INFORMATION CONTAINED WITHIN THIS ROSNOL RF/MICROWAVE TECHNOLOGY CORP. DOCUMENT IS CONSIDERED PROPRIETARY AND IS THE PROPERTY OF ROSNOL RF/MICROWAVE TECHNOLOGY CORP.

Rosnol P/N		Length (mm)
B2E50-EF402-B2E50-1000A/3G		1000
Frequency	VSWR Max.	Insertion Loss Max.
3 GHz	1,25	$\leq 0.000738 \text{ (dB/mm)} * L \text{ (mm)} + 0.15 * \sqrt{f \text{ (dB)}}$

SPECIFICATION CONTROL DRAWING

REVISION

REV.	DESCRIPTION	DATE	APPROVED
-	INITIAL RELEASE	FEB/3/2025	

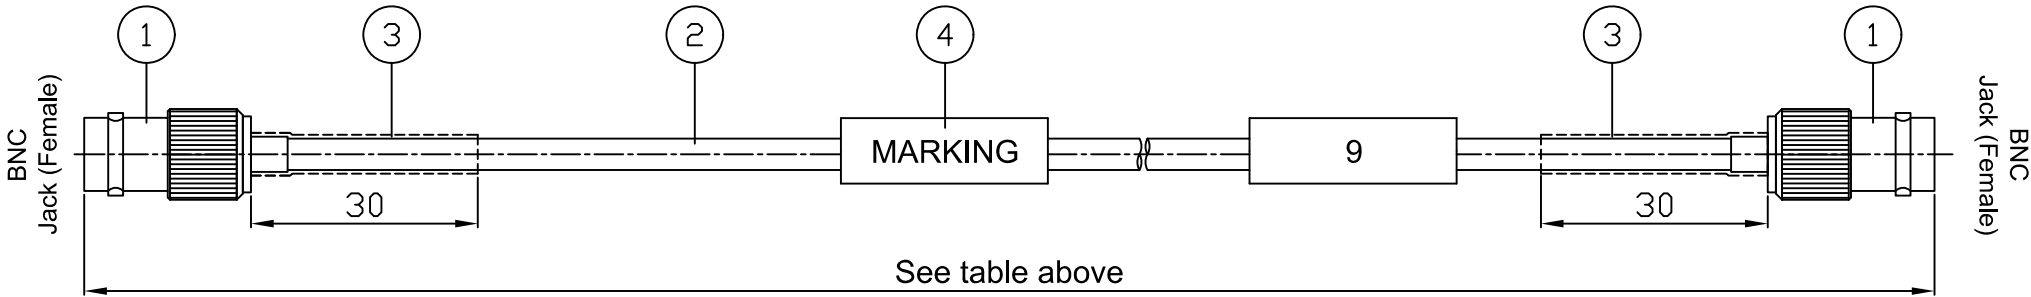

CUSTOMER'S APPROVAL

Department or
company's stamp

Name:

Date:

Copy and send back to
ROSNOL CORPORATION BEFORE:

NOTES:

- 1) CONNECTORS ASSEMBLED PER MANUFACTURERS INSTRUCTIONS.
- 2) MARKING DETAILS IF NOT SPECIAL MARKING TEXT:
ROSNOL DC- 3 GHz
B2E50-EF402-B2E50-1000A/3G
WW/YY SERIAL NUMBER
- 3) ALL DIMENSIONS ARE IN MM ; LENGTH TOLERANCES : $\pm 3 \text{ mm}$ FOR $L \leq 300 \text{ mm}$; $\pm 1\%$ FOR $L > 300 \text{ mm}$

4	LABEL HEAT SHRINK TUBE	HST-W-D6-125C	1	EA	DIMENSION ARE IN MM [INCH] TOLERANCES DECIMALS .X ± 6.35 [.250"] .XX ± 3.18 [.125"] .XXX ± 1.52 [.060"] DEGREES X° $\pm 1^\circ$	CUSTOMER	REV -	UNIT mm [inch]
3	HEAT SHRINK TUBE	HST-B-D6-125C	2X 30	mm		APPROVED	DATE	
2	CABLE	ROSNOL EF402 CABLE	1000	mm		DRAWN	DATE	
1	BNC SOLDER JACK	BNC2E50-0141A/9X	2	EA				
NO.	DESCRIPTION	PARTS NO.	QTY.	U/M				

ROSNOL

RF/Microwave Technology
www.rosnol.com
info@rosnol.com
N-CAGE Code: SFFKK0



TITLE

BNC Jack (Female) to BNC Jack (Female)
1 Meter Cable Assembly for EF402 Cable

DRAWING NO.

B2E50-EF402-B2E50-1000A/3G