


INFORMATION CONTAINED WITHIN THIS ROSNOL RF/MICROWAVE TECHNOLOGY CORP. DOCUMENT IS CONSIDERED PROPRIETARY AND IS THE PROPERTY OF ROSNOL RF/MICROWAVE TECHNOLOGY CORP.

Rosnol P/N		Length (mm)
K1K50-MP533A-K1K50-300A/ 26.5G		300
K1K50-MP533A-K1K50-500A/ 26.5G		500
K1K50-MP533A-K1K50-2000A/ 26.5G		2000
Frequency	VSWR Max.	Insertion Loss Max. (dB)
26.5 GHz	1.25	$\leq 0.00147 \text{ (dB/mm)} * L \text{ (mm)} + 0.15 * \sqrt{f}$

SPECIFICATION CONTROL DRAWING

REVISION

REV.	DESCRIPTION	DATE	APPROVED
-	INITIAL RELEASE	MAY/23/2025	

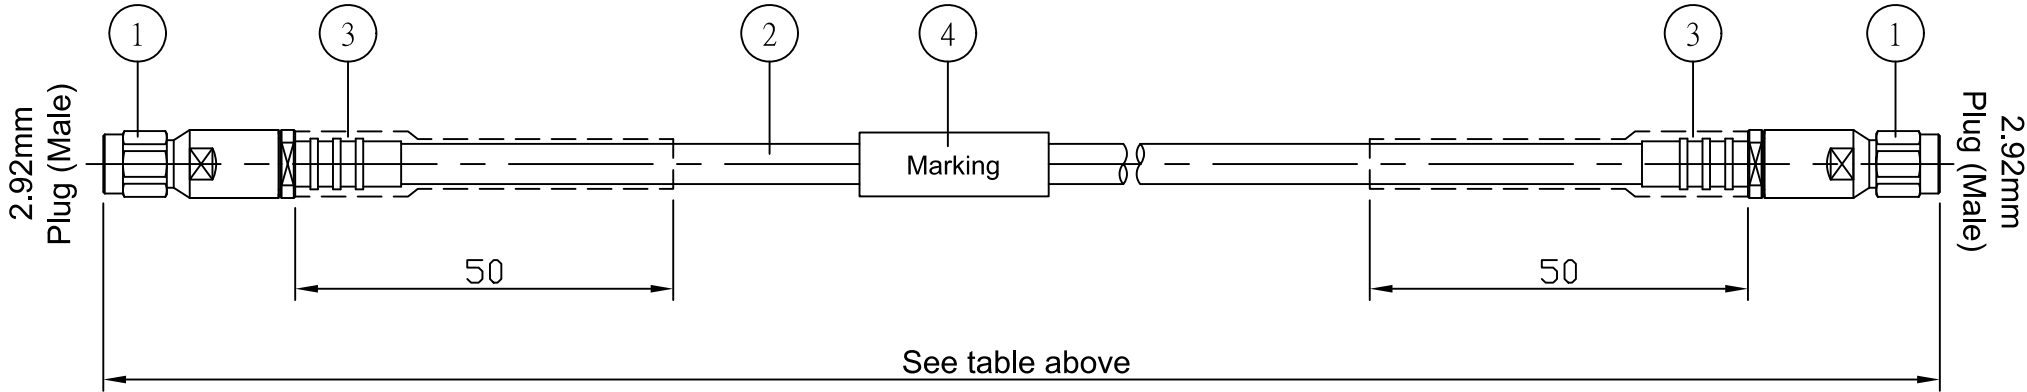

CUSTOMER'S APPROVAL

Department or
company's stamp

Name:

Date:

Copy and send back to
ROSNOL CORPORATION BEFORE:

NOTES:

- CONNECTORS ASSEMBLED PER MANUFACTURERS INSTRUCTIONS.
- MARKING DETAILS IF NOT SPECIAL MARKING TEXT:
ROSNOL DC- 26.5 GHz
K1K50-MP533A-K1K50-XXX/26.5G
WW/YY - SERIAL NUMBER
- ALL DIMENSIONS ARE IN MM ; LENGTH TOLERANCES :
 $\pm 3 \text{ mm}$ FOR $L \leq 300 \text{ mm}$; $\pm 1\%$ FOR $L > 300 \text{ mm}$

4	LABEL HEAT SHRINK TUBE	HST-W-D6-125C	1	EA	DIMENSION ARE IN MM [INCH]	CUSTOMER	REV	UNIT
3	HEAT SHRINK TUBE	HST-B-D6.4-125C-G	2X 50	mm	TOLERANCES DECIMALS .X ± 6.35 [.250"] .XX ± 3.18 [.125"] .XXX ± 1.52 [.060"] DEGREES X° ± 1°	DATE		mm [inch]
2	CABLE	ROSNOL MP533A Cable	See table above	mm		DATE		
1	2.92mm SOLDER CLAMP PLUG	K1K50-0420A/9XX	2	EA		DATE		
NO.	DESCRIPTION	PARTS NO.	QTY.	U/M				

ROSNOL

RF/Microwave Technology
www.rosnol.com
info@rosnol.com
N-CAGE Code: SFKK0

TITLE
2.92mm Plug (Male) to 2.92mm Plug (Male)
XXX Meter Cable Assembly for MP533A Cable

DRAWING NO.
K1K50-MP533A-K1K50-XXX/26.5G