
INFORMATION CONTAINED WITHIN THIS ROSNOL RF/MICROWAVE TECHNOLOGY CORP. DOCUMENT IS CONSIDERED PROPRIETARY AND IS THE PROPERTY OF ROSNOL RF/MICROWAVE TECHNOLOGY CORP.

SPECIFICATION CONTROL DRAWING

REVISION			
REV.	DESCRIPTION	DATE	APPROVED
–	INITIAL RELEASE	OCT/29/2024	

Rosnol P/N	Length (mm)
K1K50-MPUL580A-K1K50-1000 /26.5G	1000
K1K50-MPUL580A-K1K50-3000 /26.5G	3000
K1K50-MPUL580A-K1K50-5000 /26.5G	5000
K1K50-MPUL580A-K1K50-10000 /26.5G	10000

Frequency	VSWR Max.	Insertion Loss Max.
26.5 GHz	1.25	≤ 0.00114 (dB/mm) * L (mm) + 0.1* √f(dB)

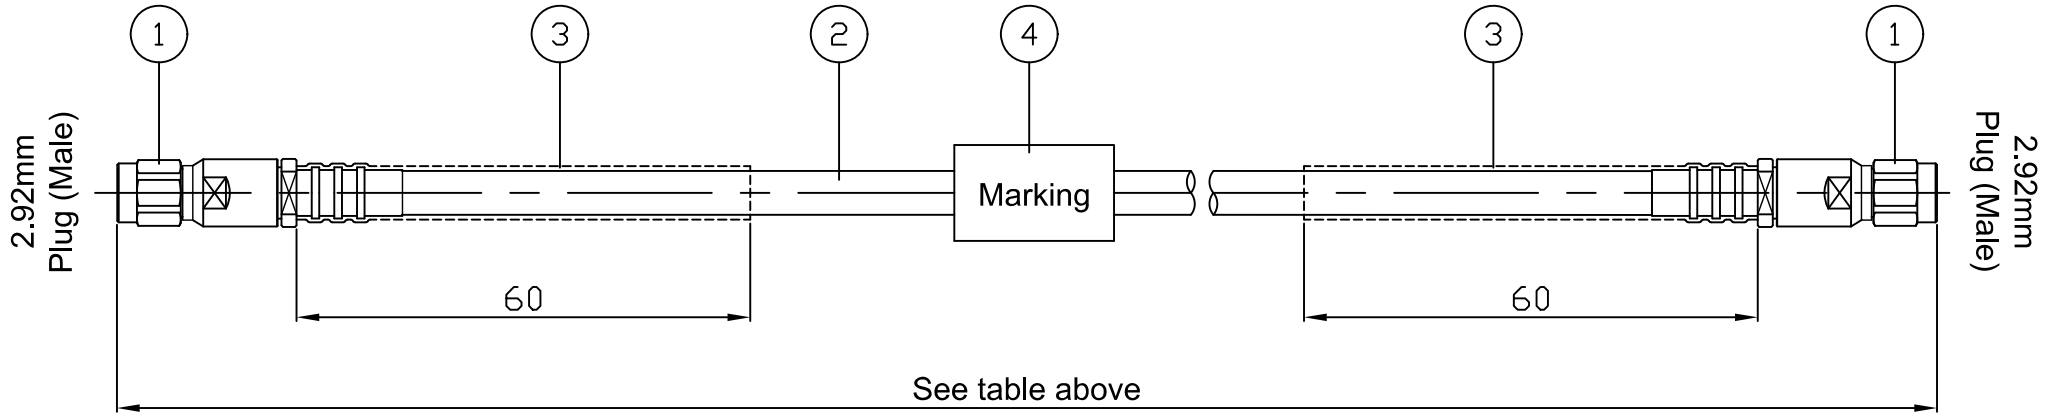

CUSTOMER'S APPROVAL

Department or company's stamp

Name:

Date:

Copy and send back to ROSNOL CORPORATION BEFORE:

NOTES:
1) CONNECTORS ASSEMBLED PER MANUFACTURERS INSTRUCTIONS.
2) MARKING DETAILS IF NOT SPECIAL MARKING TEXT:
   ROSNOL DC- 26.5 GHz
   K1K50-MPUL580A-K1K50-XXX/26.5G
   WW/YY SERIAL NUMBER
3) ALL DIMENSIONS ARE IN MM ; LENGTH TOLERANCES :
   ±3 mm FOR L<=300mm ; ±1% FOR L >300mm

NO.	DESCRIPTION	PARTS NO.	QTY.	U/M
4	LABEL HEAT SHRINK TUBE	HST-W-D6-125C	1	EA
3	HEAT SHRINK TUBE	HST-B-D6.4-125C-G	2X 60	mm
2	CABLE	ROSNOL MPUL580A Cable	See table above	mm
1	2.92mm SOLDER CLAMP PLUG	K1K50-MPUL580A/9XX	2	EA

DIMENSION ARE IN MM [INCH]

TOLERANCES

DECIMALS
.X ± 6.35 [.250"]
.XX ± 3.18 [.125"]
.XXX ± 1.52 [.060"]
DEGREES
X° ± 1°

CUSTOMER | REV: – | UNIT: mm [inch]

APPROVED | DATE

DRAWN | DATE

ROSNOL
RF/Microwave Technology
www.rosnol.com
info@rosnol.com
N-CAGE Code: SFKK0

TITLE
2.92mm Plug (Male) to 2.92mm Plug (Male)
XXX Meter Cable Assembly for MPUL580A Cable

DRAWING NO.
K1K50-MPUL580A-K1K50-XXX/26.5G