


INFORMATION CONTAINED WITHIN THIS ROSNOL RF/MICROWAVE TECHNOLOGY CORP. DOCUMENT IS CONSIDERED PROPRIETARY AND IS THE PROPERTY OF ROSNOL RF/MICROWAVE TECHNOLOGY CORP.		
Rosnol P/N		Length (mm)
M1E59-EF405-P2E50-100CA/6G		100
Frequency	VSWR Max.	Insertion Loss Max.
6 GHz	1.25	≤ 0.00197 (dB/mm) * L (mm) + 0.2 (dB)

SPECIFICATION CONTROL DRAWING

REVISION			
REV.	DESCRIPTION	DATE	APPROVED
-	INITIAL RELEASE	JAN/17/2024	

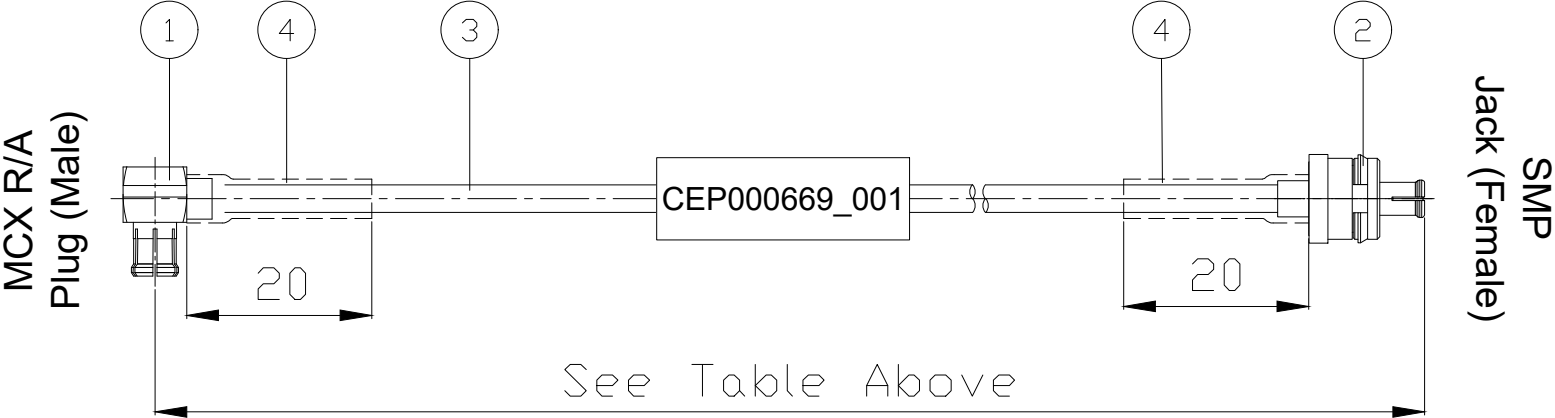

4	HEAT SHRINK TUBE	HST-B-D5-125C	2X20	mm
3	CABLE	ROSNOL EF405	100	mm
2	SMP SOLDER JACK	SMP2E50-0085B/99	1	EA
1	MCX R/A SOLDER PLUG	MCX1E59-0085B/H1	1	EA
NO.	DESCRIPTION	PARTS NO.	QTY.	U/M

DIMENSION ARE IN MM [INCH]		CUSTOMER	REV	UNIT
TOLERANCES DECIMALS .X ± 6.35 [.250"] .XX ± 3.18 [.125"] .XXX ± 1.52 [.060"] DEGREES X° ± 1°			-	mm [inch]
		DATE		
		DRAWN	DATE	

ROSNOL
RF/Microwave Technology
www.rosnol.com
info@rosnol.com
N-CAGE Code: SFKK0

TITLE
MCX R/A Plug (Male) to SMA Jack (Female)
0.1 Meter Cable Assembly for EF405 Cable

DRAWING NO.
M1E59-EF405-P2E50-100CA/6G