


INFORMATION CONTAINED WITHIN THIS ROSNOL RF/MICROWAVE TECHNOLOGY CORP. DOCUMENT IS CONSIDERED PROPRIETARY AND IS THE PROPERTY OF ROSNOL RF/MICROWAVE TECHNOLOGY CORP.

Rosnol P/N		Length (mm)
MX1E59-EF405-P2E50-100CA/6G		100
Frequency	VSWR Max.	Insertion Loss Max.
6 GHz	1.25	≤ 0.00197 (dB/mm) * L (mm) + 0.2 (dB)

SPECIFICATION CONTROL DRAWING

REVISION			
REV.	DESCRIPTION	DATE	APPROVED
-	INITIAL RELEASE	JAN/17/2024	

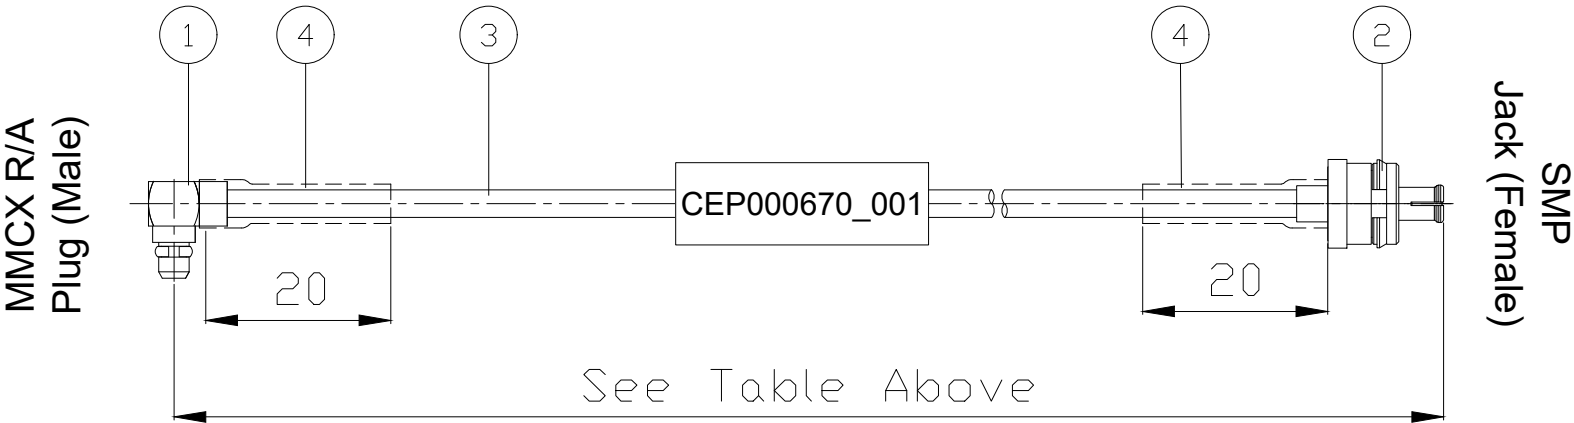

4	HEAT SHRINK TUBE	HST-B-D5-125C	2X20	mm	DIMENSION ARE IN MM [INCH] TOLERANCES DECIMALS .X ± 6.35 [".250"] .XX ± 3.18 [".125"] .XXX ± 1.52 [".060"] DEGREES X° ± 1°	CUSTOMER	REV -	UNIT mm [inch]
3	CABLE	ROSNOL EF405	100	mm		DATE		
2	SMP SOLDER JACK	SMP2E50-0085B/99	1	EA		DRAWN		
1	MMCX R/A SOLDER PLUG	MMCX1E59-0085A/13	1	EA				
NO.	DESCRIPTION	PARTS NO.	QTY.	U/M		DATE		

ROSNOL

RF/Microwave Technology
www.rosnol.com
info@rosnol.com
N-CAGE Code: SFKK0

TITLE
MMCX R/A Plug (Male) to SMA Jack (Female) 0.1 Meter Cable Assembly for EF405 Cable
DRAWING NO.
MX1E59-EF405-P2E50-100CA/6G