


INFORMATION CONTAINED WITHIN THIS ROSNOL RF/MICROWAVE TECHNOLOGY CORP. DOCUMENT IS CONSIDERED PROPRIETARY AND IS THE PROPERTY OF ROSNOL RF/MICROWAVE TECHNOLOGY CORP.

Rosnol P/N	Length (mm)	
N1K50-MP533A-A1K50-250A/11G	250	
Frequency	VSWR Max.	Insertion Loss Max. (dB)
11 GHz	1.25	$\leq 0.00097 \text{ (dB/mm)} * L \text{ (mm)} + 0.15 * \sqrt{f}$

SPECIFICATION CONTROL DRAWING

REVISION			
REV.	DESCRIPTION	DATE	APPROVED
-	INITIAL RELEASE	MAY/20/2025	

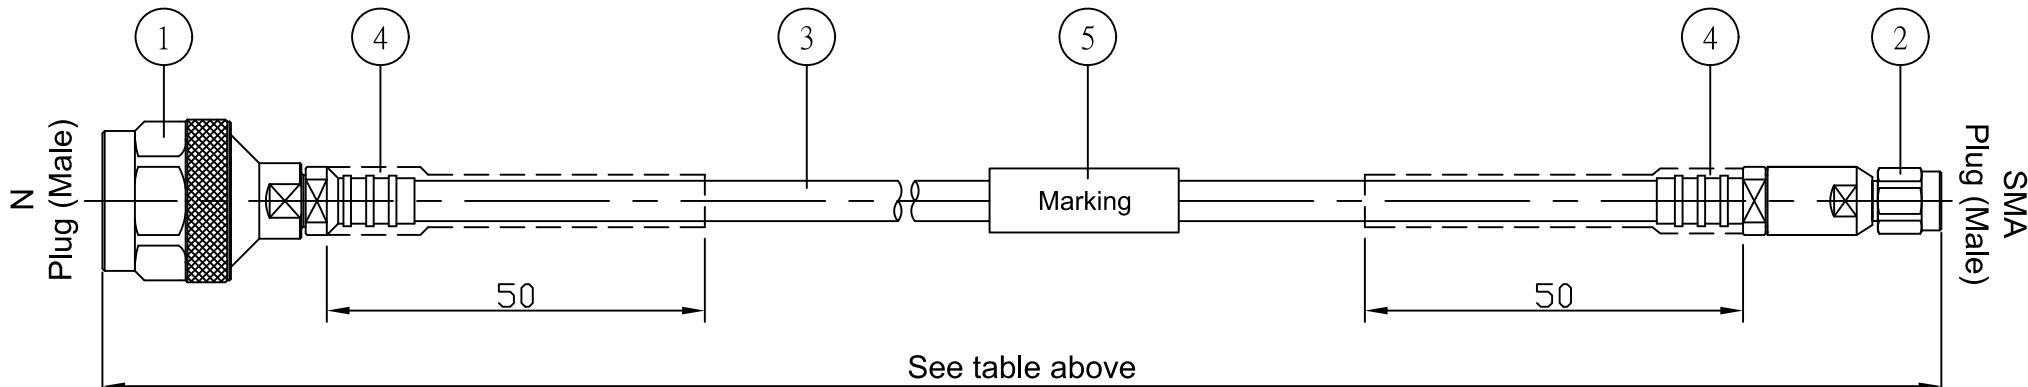

CUSTOMER'S APPROVAL

Department or company's stamp

Name:

Date:

Copy and send back to ROSNOL CORPORATION BEFORE:

NOTES:

- 1) CONNECTORS ASSEMBLED PER MANUFACTURERS INSTRUCTIONS.
- 2) MARKING DETAILS IF NOT SPECIAL MARKING TEXT:
ROSNOL DC- 11 GHz
N1K50-MP533A-A1K50-250A/11G
WW/YY - SERIAL NUMBER
- 3) ALL DIMENSIONS ARE IN MM ; LENGTH TOLERANCES :
 $\pm 3 \text{ mm}$ FOR $L \leq 300 \text{ mm}$; $\pm 1\%$ FOR $L > 300 \text{ mm}$

5	LABEL HEAT SHRINK TUBE	HST-W-D6-125C	1	EA
4	HEAT SHRINK TUBE	HST-B-D6.4-125C-G	2X 50	mm
3	CABLE	ROSNOL MP533A Cable	250	mm
2	SMA Solder Clamp Plug	SMA1K50-MP533A/9XX	1	EA
1	N Solder Clamp Plug	N1K50-MP533A/9XX	1	EA
NO.	DESCRIPTION	PARTS NO.	QTY.	U/M

DIMENSION ARE IN MM [INCH]	CUSTOMER	REV	UNIT mm [inch]
TOLERANCES			
DECIMALS .X ± 6.35 [.250"] .XX ± 3.18 [.125"] .XXX ± 1.52 [.060"]	APPROVED	DATE	
DEGREES X° ± 1°	DRAWN	DATE	

ROSNOL 
RF/Microwave Technology
www.rosnol.com
info@rosnol.com

N-CAGE Code: SFKK0
TITLE
N Plug (Male) to SMA Plug (Male)
0.25 Meter Cable Assembly for MP533A Cable

DRAWING NO.
N1K50-MP533A-A1K50-250A/11G