


INFORMATION CONTAINED WITHIN THIS ROSNOL RF/MICROWAVE TECHNOLOGY CORP. DOCUMENT IS CONSIDERED PROPRIETARY AND IS THE PROPERTY OF ROSNOL RF/MICROWAVE TECHNOLOGY CORP.

SPECIFICATION CONTROL DRAWING

| REVISION | | | |
|----------|-----------------|-------------|----------|
| REV. | DESCRIPTION | DATE | APPROVED |
| - | INITIAL RELEASE | FEB/05/2026 | |

| Rosnol P/N | Length (mm) | Insertion Loss Max. (dB) |
|-----------------------------|------------------|--------------------------|
| N1K50-MP790A-N1K50-2000A/8G | 2000 | ≤ 1.068 |
| Frequency : 8GHz | VSWR Max. : 1.25 | |

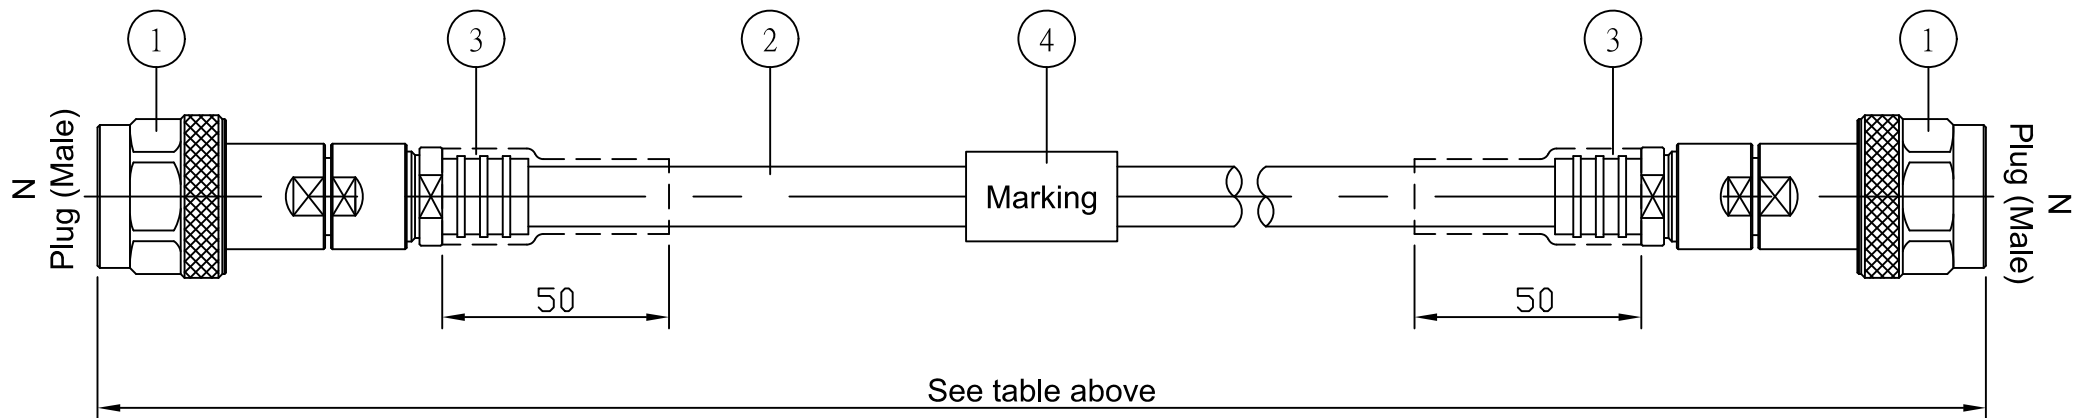

CUSTOMER'S APPROVAL

Department or company's stamp

Name:

Date:

Copy and send back to ROSNOL CORPORATION BEFORE:

NOTES:

- CONNECTORS ASSEMBLED PER MANUFACTURERS INSTRUCTIONS.
- MARKING DETAILS IF NOT SPECIAL MARKING TEXT:
ROSNOL DC-8 GHz
N1K50-MP790A-N1K50-2000A/8G
WW/YY - SERIAL NUMBER
- ALL DIMENSIONS ARE IN MM ; LENGTH TOLERANCES :
±3 mm FOR L ≤ 300mm ; ±1% FOR L > 300mm

| NO. | DESCRIPTION | PARTS NO. | QTY. | U/M | DIMENSION ARE IN MM [INCH] | CUSTOMER | REV | UNIT |
|-----|------------------------|---------------------|-------|-----|--|----------|------|-----------|
| 4 | LABEL HEAT SHRINK TUBE | HST-W-12-125C | 1 | EA | TOLERANCES DECIMALS .X ± 6.35 [.250"] .XX ± 3.18 [.125"] .XXX ± 1.52 [.060"] DEGREES X° ± 1° | - | - | mm [inch] |
| 3 | HEAT SHRINK TUBE | HST-B-D12.7-125C-G | 2X 50 | mm | | APPROVED | DATE | |
| 2 | CABLE | ROSNOL MP790A Cable | 2000 | mm | | DRAWN | DATE | |
| 1 | N SOLDER CLAMP PLUG | N1K50-MP790A/9XX | 2 | EA | | | | |
| | | | | | | | | |

ROSNOL 

RF/Microwave Technology
www.rosnol.com
info@rosnol.com
N-CAGE Code: SFKK0

TITLE
N Plug (Male) to N Plug (Male)
2 Meter Cable Assembly for MP790A Cable

DRAWING NO.
N1K50-MP790A-N1K50-2000A/8G