


INFORMATION CONTAINED WITHIN THIS ROSNOL RF/MICROWAVE TECHNOLOGY CORP. DOCUMENT IS CONSIDERED PROPRIETARY AND IS THE PROPERTY OF ROSNOL RF/MICROWAVE TECHNOLOGY CORP.

SPECIFICATION CONTROL DRAWING

REVISION			
REV.	DESCRIPTION	DATE	APPROVED
-	INITIAL RELEASE	JAN/30/2026	

Rosnol P/N	Length (mm)	Insertion Loss Max. (dB)
N1K50-MP790A-N1K50-3000A/12G	3000	≤ 1.904
Frequency : 12GHz	VSWR Max. : 1.25	

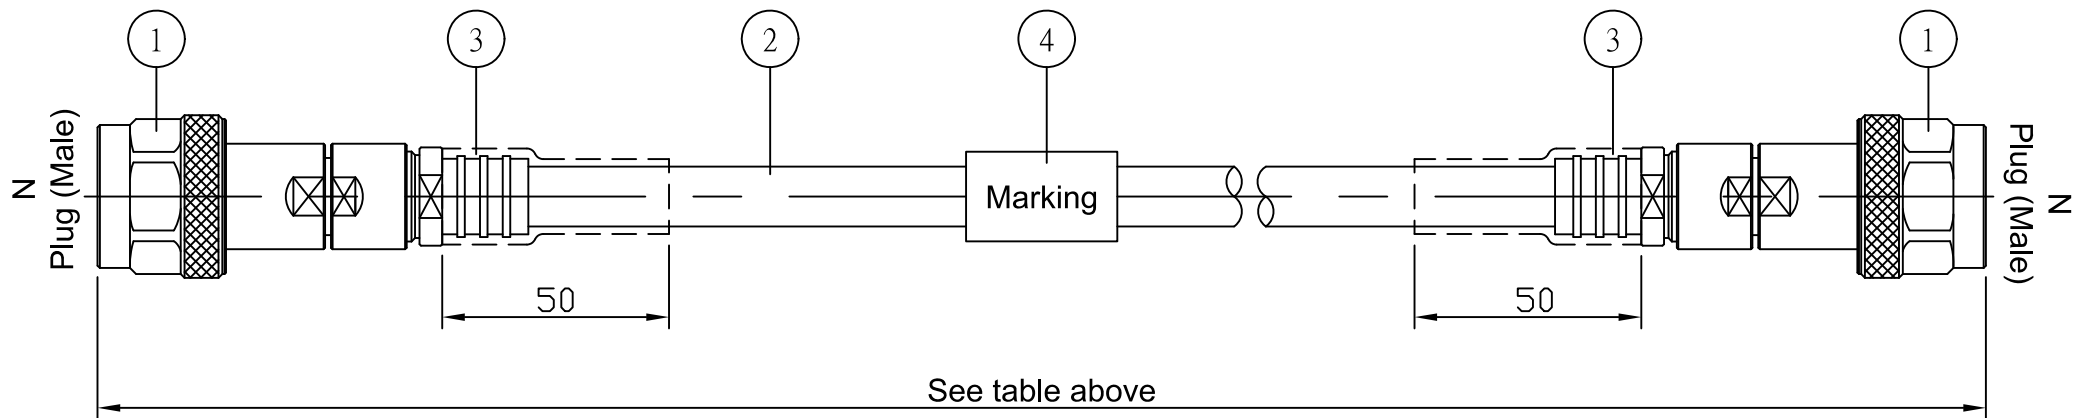

CUSTOMER'S APPROVAL

Department or company's stamp

Name:

Date:

Copy and send back to ROSNOL CORPORATION BEFORE:

NOTES:

- CONNECTORS ASSEMBLED PER MANUFACTURERS INSTRUCTIONS.
- MARKING DETAILS IF NOT SPECIAL MARKING TEXT:
ROSNOL DC-12 GHz
N1K50-MP790A-N1K50-3000A/12G
WW/YY - SERIAL NUMBER
- ALL DIMENSIONS ARE IN MM ; LENGTH TOLERANCES :
±3 mm FOR L≤300mm ; ±1% FOR L >300mm

NO.	DESCRIPTION	PARTS NO.	QTY.	U/M	DIMENSION ARE IN MM [INCH]	CUSTOMER	REV	UNIT	
4	LABEL HEAT SHRINK TUBE	HST-W-12-125C	1	EA	TOLERANCES DECIMALS .X ± 6.35 [.250"] .XX ± 3.18 [.125"] .XXX ± 1.52 [.060"] DEGREES X° ± 1°	-	-	mm [inch]	
3	HEAT SHRINK TUBE	HST-B-D12.7-125C-G	2X 50	mm		APPROVED	DATE		
2	CABLE	ROSNOL MP790A Cable	3000	mm		DRAWN	DATE		
1	N SOLDER CLAMP PLUG	N1K50-MP790A/9XX	2	EA					

ROSNOL 

RF/Microwave Technology
www.rosnol.com
info@rosnol.com
N-CAGE Code: SFKK0

TITLE
N Plug (Male) to N Plug (Male)
3 Meter Cable Assembly for MP790A Cable

DRAWING NO.
N1K50-MP790A-N1K50-3000A/12G