


INFORMATION CONTAINED WITHIN THIS ROSNOL RF/MICROWAVE TECHNOLOGY CORP. DOCUMENT IS CONSIDERED PROPRIETARY AND IS THE PROPERTY OF ROSNOL RF/MICROWAVE TECHNOLOGY CORP.

SPECIFICATION CONTROL DRAWING

REVISION			
REV.	DESCRIPTION	DATE	APPROVED
-	INITIAL RELEASE	FEB/04/2026	

Rosnol P/N	Length (mm)	Insertion Loss Max. (dB)
N1K50-MPUL580A-N1K50-2000A/8G	2	≤ 1.427
Frequency : 8GHz	VSWR Max. : 1.25	

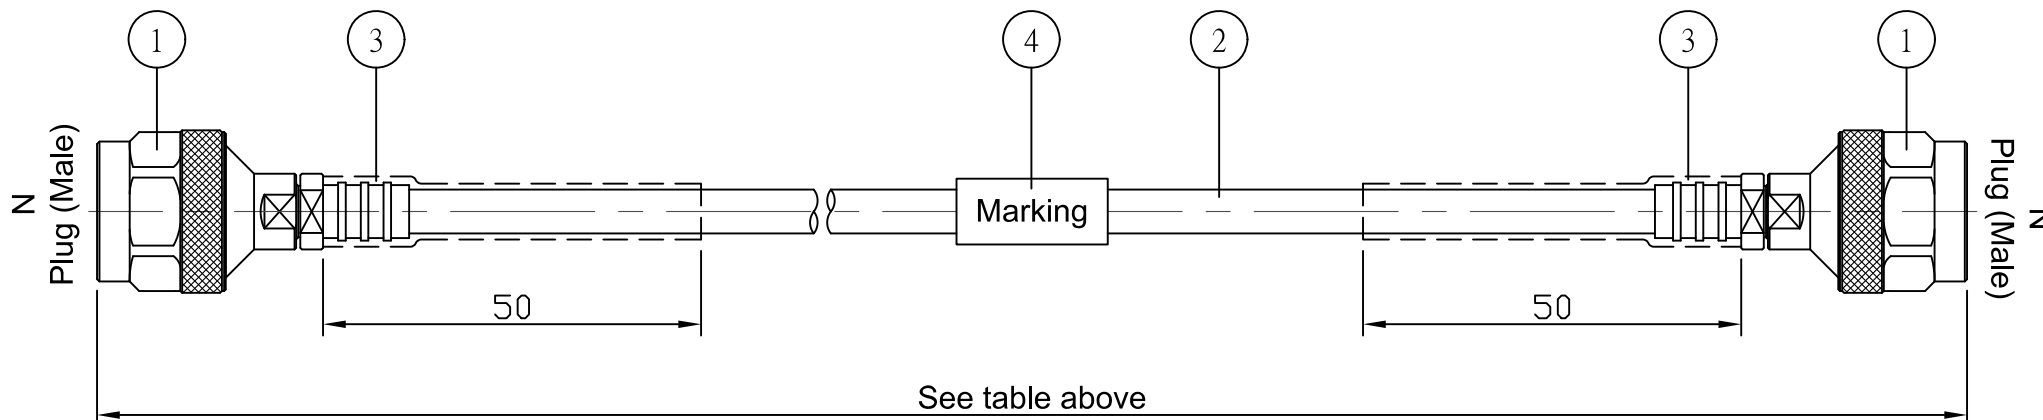

- NOTES:
- CONNECTORS ASSEMBLED PER MANUFACTURERS INSTRUCTIONS.
 - MARKING DETAILS IF NOT SPECIAL MARKING TEXT:
 ROSNOL DC-8 GHz
 N1K50-MPUL580A-N1K50-2000A/8G
 WW/YY - SERIAL NUMBER
 - ALL DIMENSIONS ARE IN MM ; LENGTH TOLERANCES :
 ±3 mm FOR L ≤ 300mm ; ±1% FOR L > 300mm

CUSTOMER'S APPROVAL	
Department or company's stamp	
Name:	
Date:	
Copy and send back to ROSNOL CORPORATION BEFORE:	

ROSNOL 

RF/Microwave Technology
www.rosnol.com
info@rosnol.com
 N-CAGE Code: SFKK0

NO.	DESCRIPTION	PARTS NO.	QTY.	U/M	DIMENSION ARE IN MM [INCH]	CUSTOMER	REV	UNIT	
4	LABEL HEAT SHRINK TUBE	HST-W-D8-125C	1	EA	TOLERANCES DECIMALS .X ± 6.35 [.250"] .XX ± 3.18 [.125"] .XXX ± 1.52 [.060"] DEGREES X° ± 1°	-	-	mm [inch]	
3	HEAT SHRINK TUBE	HST-B-D7.9-125C-G	2X 50	mm		APPROVED	DATE		
2	CABLE	ROSNOL MPUL580A Cable	2000	mm		DRAWN	DATE		
1	N SOLDER CLAMP PLUG	N1K50-MPUL580A/9XX	2	EA					

TITLE
 N Plug (Male) to N Plug (Male)
 2 Meter Cable Assembly for MPUL580A Cable

DRAWING NO.
N1K50-MPUL580A-N1K50-2000A/8G