
INFORMATION CONTAINED WITHIN THIS ROSNOL RF/MICROWAVE TECHNOLOGY CORP. DOCUMENT IS CONSIDERED PROPRIETARY AND IS THE PROPERTY OF ROSNOL RF/MICROWAVE TECHNOLOGY CORP.

SPECIFICATION CONTROL DRAWING

Rosnol P/N		Length (mm)
N1K50-MPUL774A_ELSFH-N1K50-30000A/4G		30000
Frequency	**VSWR Max.**	**Insertion Loss Max.**
4 GHz	1.25	≤ 0.000295 (dB/mm) * L (mm) + 0.1* √f(dB)

REVISION			
REV.	DESCRIPTION	DATE	APPROVED
–	INITIAL RELEASE	OCT/24/2024	

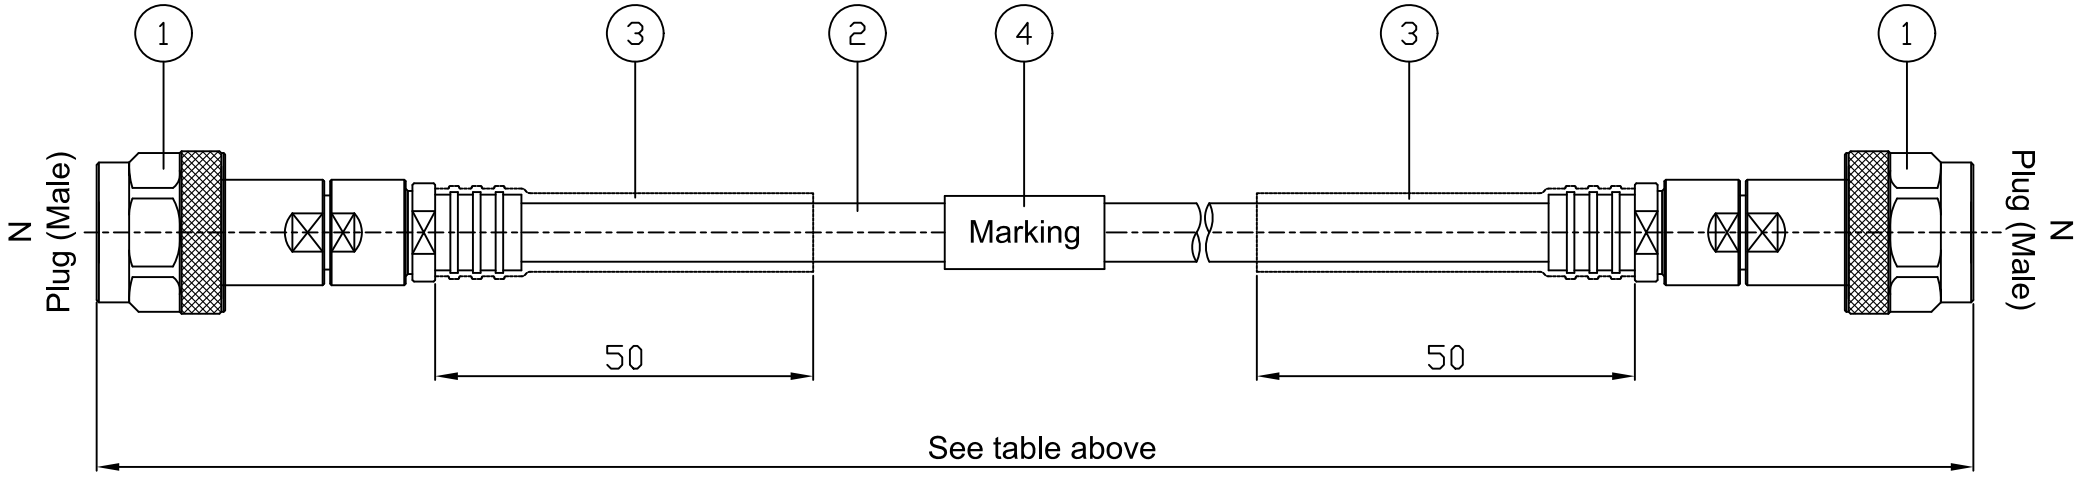

NOTES:
1) CONNECTORS ASSEMBLED PER MANUFACTURERS INSTRUCTIONS.
2) MARKING DETAILS IF NOT SPECIAL MARKING TEXT:
   ROSNOL DC- 4 GHz
   N1K50-MPUL774A_ELSFH-N1K50-30000A/4G
   WW/YY SERIAL NUMBER
3) ALL DIMENSIONS ARE IN MM ; LENGTH TOLERANCES : ±3 mm FOR L<=300mm ; ±1% FOR L >300mm

CUSTOMER'S APPROVAL

Department or company's stamp

Name:

Date:

Copy and send back to ROSNOL CORPORATION BEFORE:

NO.	DESCRIPTION	PARTS NO.	QTY.	U/M
4	LABEL HEAT SHRINK TUBE	HST-W-D10-125C	1	EA
3	HEAT SHRINK TUBE	HST-B-D12.7-125C-G	2X 50	mm
2	CABLE (comes with ELSFH Jacket)	ROSNOL MPUL774A_ELSFH Cable	30000	mm
1	N SOLDER CLAMP PLUG	N1K50-0630A/1XX	2	EA

DIMENSION ARE IN MM [INCH]

TOLERANCES

DECIMALS
.X ± 6.35 [.250"]
.XX ± 3.18 [.125"]
.XXX ± 1.52 [.060"]
DEGREES
X° ± 1°

CUSTOMER | REV – | UNIT mm [inch]

APPROVED DATE

DRAWN DATE

ROSNOL
RF/Microwave Technology
www.rosnol.com
info@rosnol.com
N-CAGE Code: SFKK0

TITLE
N Plug (Male) to N Plug (Male)
30 Meter Cable Assembly for MPUL774A_ELSFH Cable

DRAWING NO.
N1K50-MPUL774A_ELSFH-N1K50-30000A/4G