



INFORMATION CONTAINED WITHIN THIS ROSNOL RF/MICROWAVE TECHNOLOGY CORP. DOCUMENT IS CONSIDERED PROPRIETARY AND IS THE PROPERTY OF ROSNOL RF/MICROWAVE TECHNOLOGY CORP.		
Rosnol P/N		Length (mm)
N2EA50-EF402-A1E59-380AC/11G		380
Frequency	VSWR Max.	Insertion Loss Max.
11 GHz	1.25	≤ 0.00209 (dB/mm) * L (mm) + 0.1 (dB)

SPECIFICATION CONTROL DRAWING

REVISION			
REV.	DESCRIPTION	DATE	APPROVED
-	INITIAL RELEASE	JAN/17/2024	
1.0		FEB/26/2024	

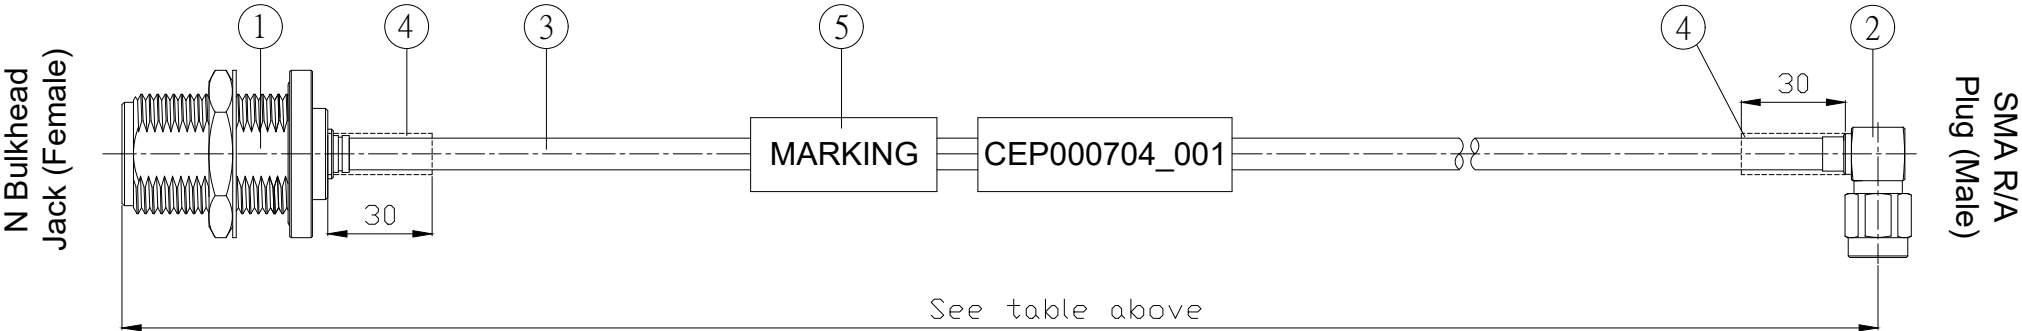

MOUNTING DIMENSIONS

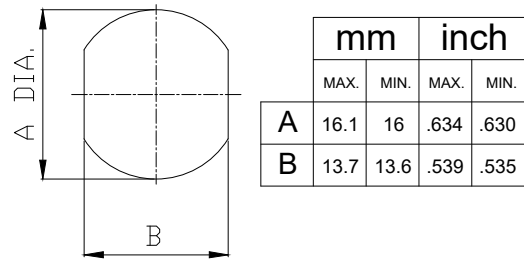

- NOTES:
- 1) CONNECTORS ASSEMBLED PER MANUFACTURERS INSTRUCTIONS.
 - 2) MARKING DETAILS PLEASE FOLLOW THE DRAWING TEXT

5	LABEL HEAT SHRINK TUBE	HST-W-D5-125C-G	2	EA
4	HEAT SHRINK TUBE	HST-B-D5-125C	2X 30	mm
3	CABLE	ROSNOL EF402A	380	mm
2	SMA R/A SOLDER PLUG	SMA1E59-0141A/911	1	EA
1	N BULKHEAD SOLDER JACK	N2EA50-0141A/H1	1	EA
NO.	DESCRIPTION	PARTS NO.	QTY.	U/M

DIMENSION ARE IN MM [INCH]		CUSTOMER	REV	UNIT
TOLERANCES			1.0	mm [inch]
DECIMALS		DATE		
.X ± 6.35 [.250"]				
.XX ± 3.18 [.125"]				
.XXX ± 1.52 [.060"]				
DEGREES		DATE		
X° ± 1°				

ROSNOL

RF/Microwave Technology
www.rosnol.com
info@rosnol.com
N-CAGE Code: SFKK0

TITLE

N Bulkhead Jack (Female) to SMA R/A Plug (Male)
0.38 Meter Cable Assembly for EF402 Cable

DRAWING NO.

N2EA50-EF402-A1E59-380AC/ 11G