


INFORMATION CONTAINED WITHIN THIS ROSNOL RF/MICROWAVE TECHNOLOGY CORP. DOCUMENT IS CONSIDERED PROPRIETARY AND IS THE PROPERTY OF ROSNOL RF/MICROWAVE TECHNOLOGY CORP.		
Rosnol P/N		Length (mm)
P2E50-EF405-M1E59-100AC/6G		100
Frequency	VSWR Max.	Insertion Loss Max.
6 GHz	1.25	≤ 0.00197 (dB/mm) * L (mm) + 0.2 (dB)

SPECIFICATION CONTROL DRAWING

REVISION			
REV.	DESCRIPTION	DATE	APPROVED
-	INITIAL RELEASE	JAN/17/2024	
1.0		FEB/26/2024	

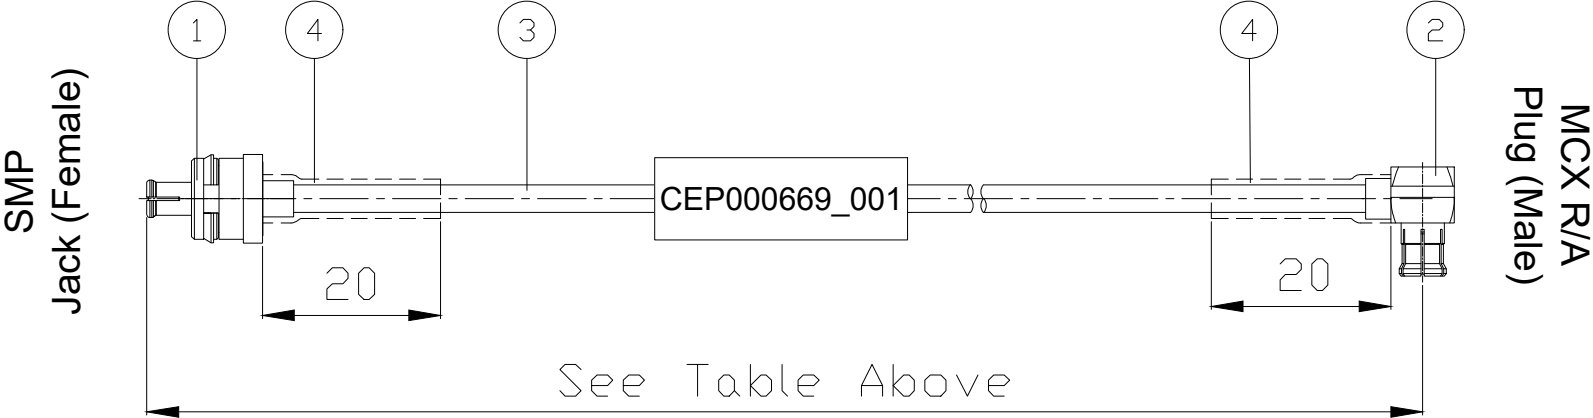

4	HEAT SHRINK TUBE	HST-B-D5-125C	2X20	mm	DIMENSION ARE IN MM [INCH] TOLERANCES DECIMALS .X ± 6.35 [.250"] .XX ± 3.18 [.125"] .XXX ± 1.52 [.060"] DEGREES X° ± 1°	CUSTOMER	REV -	UNIT mm [inch]
3	CABLE	ROSNOL EF405	100	mm		DATE		
2	MCX R/A SOLDER PLUG	MCX1E59-0085B/H1	1	EA		DATE		
1	SMP SOLDER JACK	SMP2E50-0085B/99	1	EA		DATE		
NO.	DESCRIPTION	PARTS NO.	QTY.	U/M				

ROSNOL
RF/Microwave Technology
www.rosnol.com
info@rosnol.com
N-CAGE Code: SFKK0

TITLE
SMP Jack (Female) to MCX R/A Plug (Male)
0.1 Meter Cable Assembly for EF405 Cable

DRAWING NO.
P2E50-EF405-M1E59-100AC/6G