


INFORMATION CONTAINED WITHIN THIS ROSNOL RF/MICROWAVE TECHNOLOGY CORP. DOCUMENT IS CONSIDERED PROPRIETARY AND IS THE PROPERTY OF ROSNOL RF/MICROWAVE TECHNOLOGY CORP.

Rosnol P/N		Length (mm)
P2E50-EF405-P2E59-100AC/40G		100
Frequency	VSWR Max.	Insertion Loss Max.
40 GHz	1.25	≤ 0.0067 (dB/mm) * L (mm) + 0.2 (dB)

SPECIFICATION CONTROL DRAWING

REVISION			
REV.	DESCRIPTION	DATE	APPROVED
-	INITIAL RELEASE	JAN/17/2024	
1.0		FEB/26/2024	

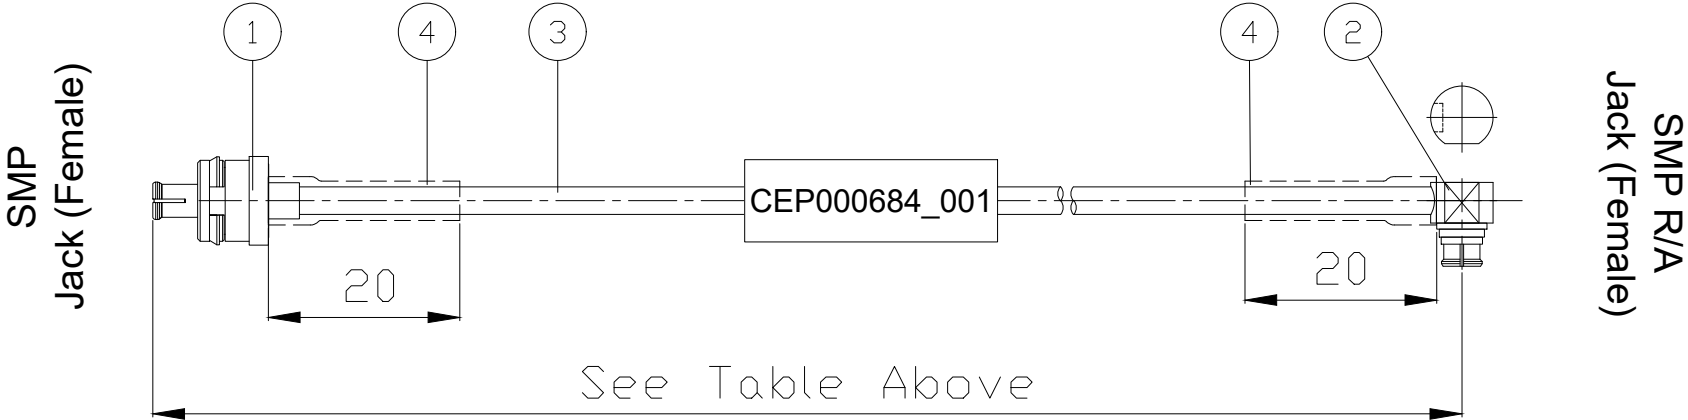

4	HEAT SHRINK TUBE	HST-B-D5-125C	2X20	mm	DIMENSION ARE IN MM [INCH] TOLERANCES DECIMALS .X ± 6.35 [.250"] .XX ± 3.18 [.125"] .XXX ± 1.52 [.060"] DEGREES X° ± 1°	CUSTOMER	REV	UNIT
3	CABLE	ROSNOL EF405	100	mm			1.0	mm [inch]
2	SMP R/A SOLDER JACK	SMP2E59-0085A-R/13	1	EA		DATE		
1	SMP SOLDER JACK	SMP2E50-0085B/99	1	EA		DATE		
NO.	DESCRIPTION	PARTS NO.	QTY.	U/M				

ROSNOL

RF/Microwave Technology

www.rosnol.com

info@rosnol.com

N-CAGE Code: SFKK0

TITLE

SMP Jack (Female) to SMP R/A Jack (Female)

0.1 Meter Cable Assembly for EF405 Cable

DRAWING NO.

P2E50-EF405-P2E59-100AC/40G