


INFORMATION CONTAINED WITHIN THIS ROSNOL RF/MICROWAVE TECHNOLOGY CORP. DOCUMENT IS CONSIDERED PROPRIETARY AND IS THE PROPERTY OF ROSNOL RF/MICROWAVE TECHNOLOGY CORP.

# SPECIFICATION CONTROL DRAWING

REVISION			
REV.	DESCRIPTION	DATE	APPROVED
-	INITIAL RELEASE	DEC/08/2025	

Rosnol P/N		Length (mm)
PC1K50-MP533A-PC1K50-3000A/18G		3000
PC1K50-MP533A-PC1K50-5000A/18G		5000
Frequency	VSWR Max.	Insertion Loss Max. (dB)
18 GHz	1.25	$\leq 0.00118 \text{ (dB/mm)} * L \text{ (mm)} + 0.15 * \sqrt{f}$

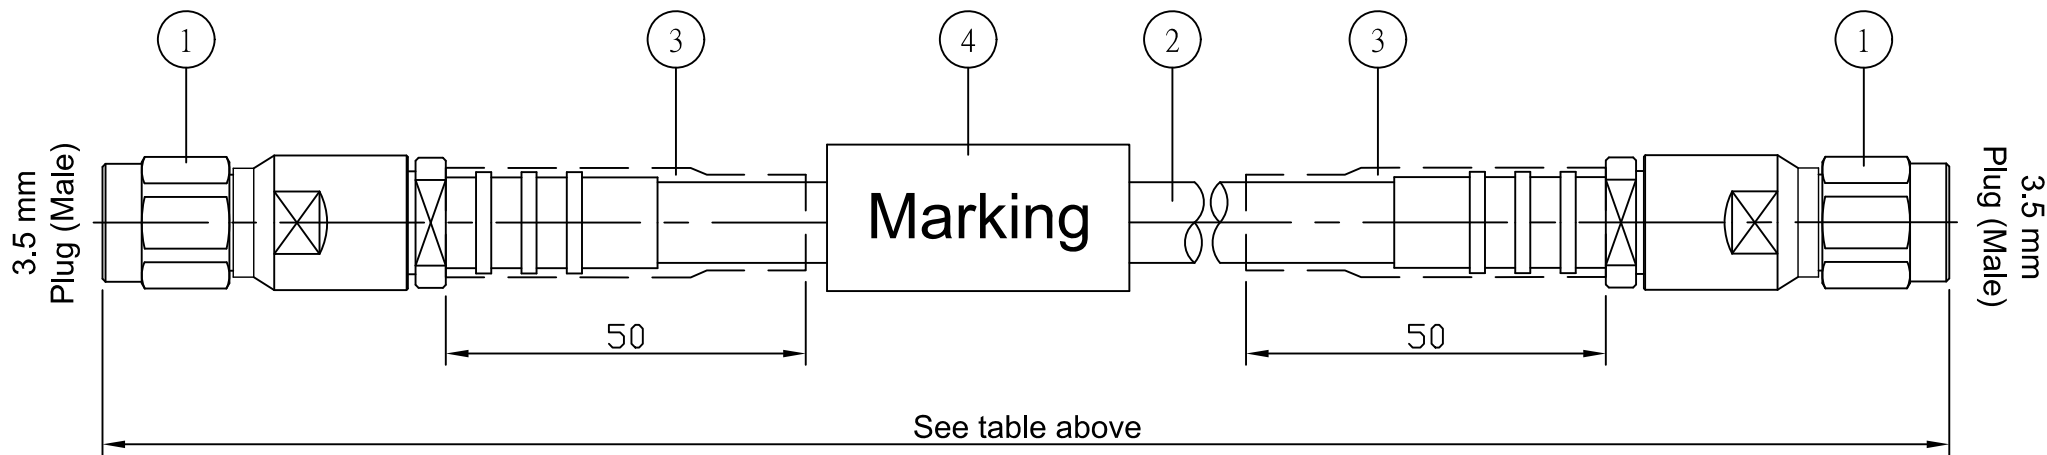

## CUSTOMER'S APPROVAL

Department or company's stamp

Name:

Date:

Copy and send back to ROSNOL CORPORATION BEFORE:

### NOTES:

- CONNECTORS ASSEMBLED PER MANUFACTURERS INSTRUCTIONS.
- MARKING DETAILS IF NOT SPECIAL MARKING TEXT:  
 ROSNOL DC- 18 GHz  
 PC1K50-MP533A-PC1K50-XXX/18G  
 WW/YY - SERIAL NUMBER
- ALL DIMENSIONS ARE IN MM ; LENGTH TOLERANCES :  
 $\pm 3 \text{ mm}$  FOR  $L \leq 300 \text{ mm}$  ;  $\pm 1\%$  FOR  $L > 300 \text{ mm}$

NO.	DESCRIPTION	PARTS NO.	QTY.	U/M	DIMENSION ARE IN MM [INCH]	CUSTOMER	REV	UNIT
4	LABEL HEAT SHRINK TUBE	HST-W-D6-125C	1	EA	TOLERANCES  DECIMALS .X $\pm 6.35$ [.250"] .XX $\pm 3.18$ [.125"] .XXX $\pm 1.52$ [.060"]  DEGREES X° $\pm 1^\circ$	-	-	mm [inch]
3	HEAT SHRINK TUBE	HST-B-D6.4-125C-G	2X 50	mm		APPROVED	DATE	
2	CABLE	ROSNOL MP533A Cable	See table above	mm		DRAWN		
1	3.5 mm SOLDER CLAMP PLUG	PC1K50-MP533A/9XX	2	EA		DATE		

**ROSNOL**

RF/Microwave Technology  
[www.rosnol.com](http://www.rosnol.com)  
[info@rosnol.com](mailto:info@rosnol.com)  
 N-CAGE Code: SFKK0

TITLE  
 3.5mm Plug (Male) to 3.5mm Plug (Male)  
 XXX Meter Cable Assembly for MP533A Cable

DRAWING NO.  
**PC1K50-MP533A-PC1K50-XXX/18G**