


INFORMATION CONTAINED WITHIN THIS ROSNOL RF/MICROWAVE TECHNOLOGY CORP. DOCUMENT IS CONSIDERED PROPRIETARY AND IS THE PROPERTY OF ROSNOL RF/MICROWAVE TECHNOLOGY CORP.

SPECIFICATION CONTROL DRAWING

REVISION			
REV.	DESCRIPTION	DATE	APPROVED
-	INITIAL RELEASE	JAN/19/2026	

Rosnol P/N	Length (inches)	Insertion Loss Max. (dB)
PCA1K50-MP533A-PCA1K50-24inA/26G	24	≤ 1.145
Frequency : 26GHz	VSWR Max. : 1.25	

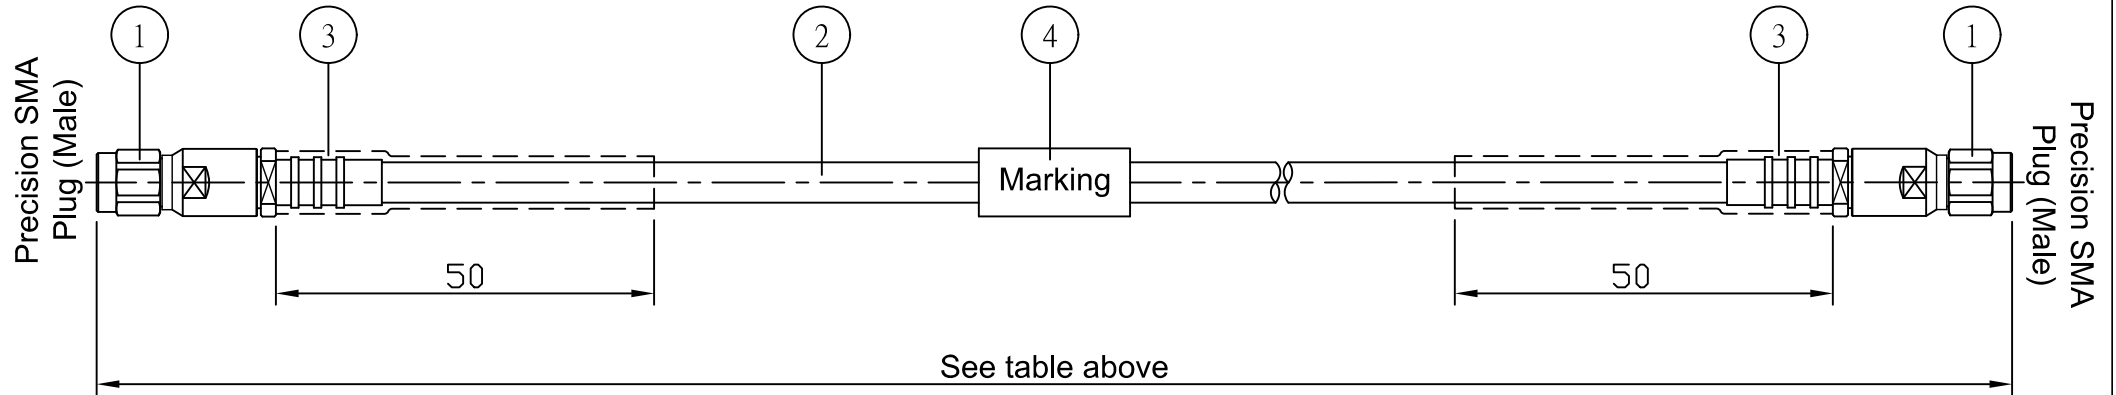

NOTES:

- CONNECTORS ASSEMBLED PER MANUFACTURERS INSTRUCTIONS.
- MARKING DETAILS IF NOT SPECIAL MARKING TEXT:
 ROSNOL DC- 26 GHz
 PCA1K50-MP533A-PCA1K50-24inA/26G
 WW/YY - SERIAL NUMBER
- ALL DIMENSIONS ARE IN INCHES ; LENGTH TOLERANCES :
 ± .12in FOR L≤12in ; ±1% FOR L >12in

CUSTOMER'S APPROVAL

Department or company's stamp

Name:

Date:

Copy and send back to ROSNOL CORPORATION BEFORE:

NO.	DESCRIPTION	PARTS NO.	QTY.	U/M	DIMENSION ARE IN MM [INCH]	CUSTOMER	REV	UNIT
4	LABEL HEAT SHRINK TUBE	HST-W-D6-125C	1	EA	TOLERANCES DECIMALS .X ± 6.35 [.250"] .XX ± 3.18 [.125"] .XXX ± 1.52 [.060"] DEGREES X° ± 1°	-	-	mm [inch]
3	HEAT SHRINK TUBE	HST-B-D6.4-125C-G	2X 50	mm		APPROVED	DATE	
2	CABLE	ROSNOL MP533A Cable	24	in		DRAWN	DATE	
1	Precision SMA SOLDER CLAMP PLUG	PCA1K50-MP533A/9XX	2	EA				



RF/Microwave Technology
 www.rosnol.com
 info@rosnol.com
 N-CAGE Code: SFKK0

TITLE
 Precision SMA Plug (Male) to Precision SMA Plug (Male)
 24 in Cable Assembly for MP533A Cable

DRAWING NO.
 PCA1K50-MP533A-PCA1K50-24inA/26G