


INFORMATION CONTAINED WITHIN THIS ROSNOL RF/MICROWAVE TECHNOLOGY CORP. DOCUMENT IS CONSIDERED PROPRIETARY AND IS THE PROPERTY OF ROSNOL RF/MICROWAVE TECHNOLOGY CORP.

Rosnol P/N		Length (mm)
PCN1K50-MP533A-PM-PCN1K50-1000A/18G		1000
Frequency	VSWR Max.	Insertion Loss Max.
18 GHz	1.25	$\leq 0.00118 \text{ (dB/mm)} * L \text{ (mm)} + 0.1 * \sqrt{f} \text{ (dB)}$

SPECIFICATION CONTROL DRAWING

REVISION

REV.	DESCRIPTION	DATE	APPROVED
-	INITIAL RELEASE	SEP/26/2024	

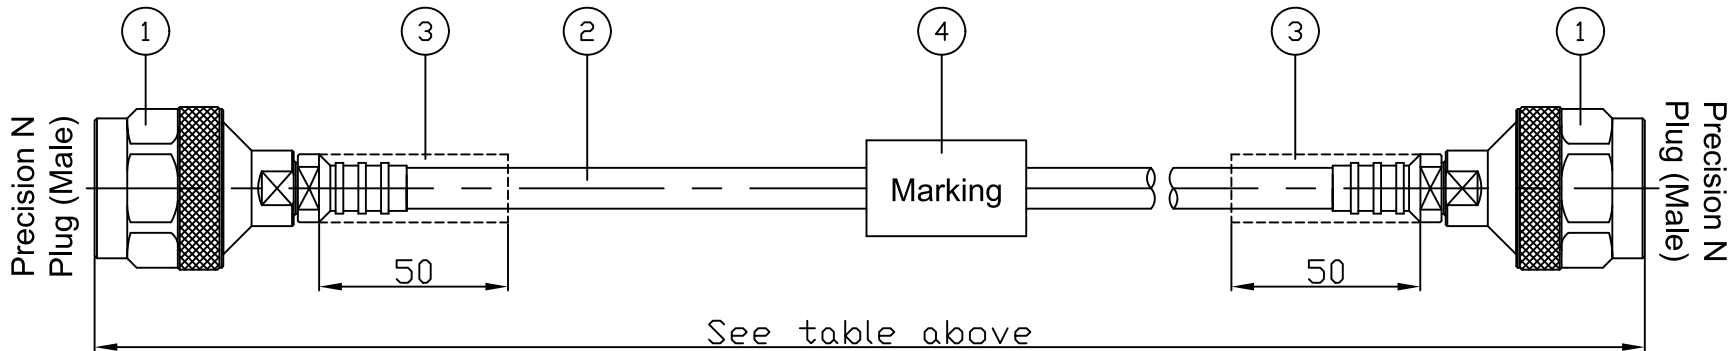

NOTES:

- 1) CONNECTORS ASSEMBLED PER MANUFACTURERS INSTRUCTIONS.
- 2) TEST AND MEASUREMENT 100%, DC-18 GHz VSWR X.XX, INSERTION LOSS: XXXX dB (SEE TABLE)
- 3) MARKING DETAILS IF NOT SPECIAL MARKING TEXT:
ROSNOL DC-18 GHz
PCN1K50-MP533A-PM-PCN1K50-1000A/18G
WWYY-SERIAL NUMBER
- 4) ALL DIMENSIONS ARE IN MM ; LENGTH TOLERANCES : $\pm 3 \text{ mm}$ FOR $L \leq 300 \text{ mm}$; $\pm 1\%$ FOR $L > 300$
- 5) Phase Matching: $\pm 2.5 \text{ degree@ } 5 \text{ GHz}$

CUSTOMER'S APPROVAL

Department or
company's stamp

Name:

Date:

Copy and send back to
ROSNOL CORPORATION BEFORE:

4	LABEL HEAT SHRINK TUBE	HST-W-D6-125C	1	EA	DIMENSION ARE IN MM [INCH] TOLERANCES DECIMALS .X ± 6.35 [.250"] .XX ± 3.18 [.125"] .XXX ± 1.52 [.060"] DEGREES X° $\pm 1^\circ$	CUSTOMER	REV	UNIT
3	HEAT SHRINK TUBE	HST-B-D6.4-125C-G	2X 50	mm			-	mm [inch]
2	CABLE	ROSNOL MP533A Cable	1000	mm		APPROVED	DATE	
1	Precision N Solder Clamp Plug	PCN1K50-MP533AEA/9XX	2	EA		DRAWN	DATE	
NO.	DESCRIPTION	PARTS NO.	QTY.	U/M				

ROSNOL

RF/Microwave Technology
www.rosnol.com
info@rosnol.com
N-CAGE Code: SFKK0



TITLE

Precision N Plug (Male) to Precision N Plug (Male)
1 Meter Cable Assembly for MP533A-PM Cable

DRAWING NO.

PCN1K50-MP533A-PM-PCN1K50-1000A/18G