


INFORMATION CONTAINED WITHIN THIS ROSNOL RF/MICROWAVE TECHNOLOGY CORP. DOCUMENT IS CONSIDERED PROPRIETARY AND IS THE PROPERTY OF ROSNOL RF/MICROWAVE TECHNOLOGY CORP.

Rosnol P/N		Length (mm)
PCN1K59-MPUL774A-PCN1K50-2500CA/18G		2500
Frequency	VSWR Max.	Insertion Loss Max.
18 GHz	1.3	$\leq 0.00066 \text{ (dB/mm)} * L \text{ (mm)} + 0.18 * \sqrt{f} \text{ (dB)}$

SPECIFICATION CONTROL DRAWING

REVISION

REV.	DESCRIPTION	DATE	APPROVED
-	INITIAL RELEASE	FEB/26/2025	

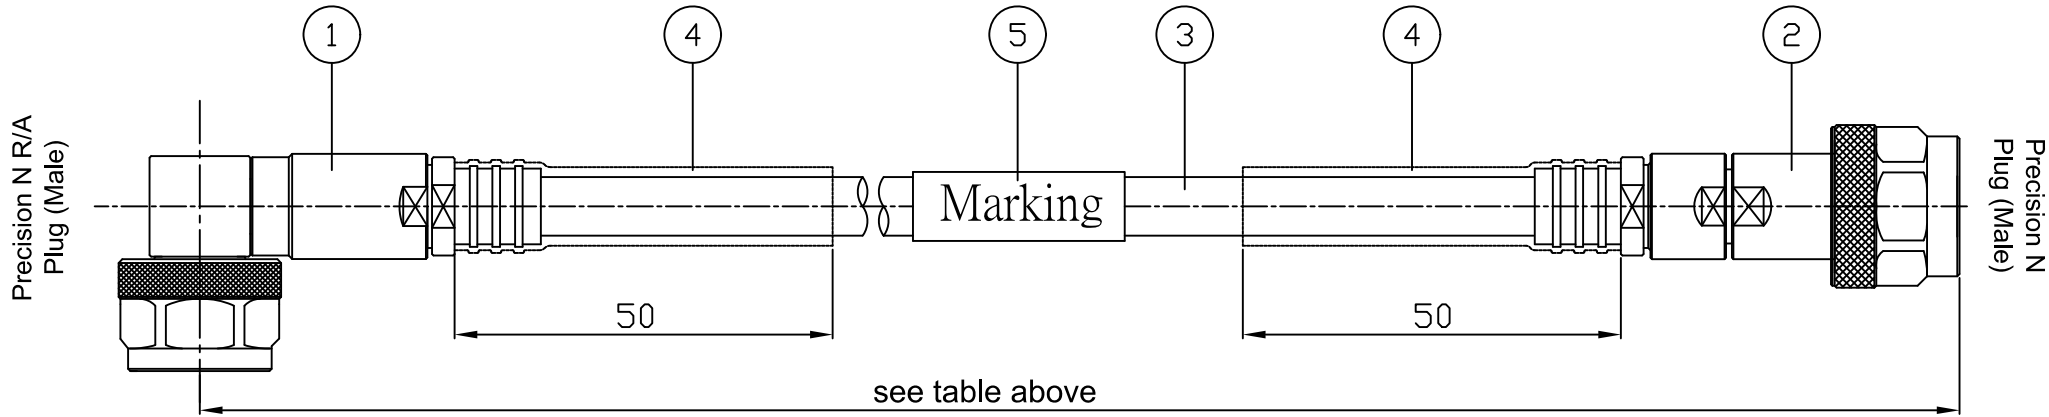

NOTES:

- CONNECTORS ASSEMBLED PER MANUFACTURERS INSTRUCTIONS.
- MARKING DETAILS IF NOT SPECIAL MARKING TEXT:
ROSNOL DC- 18 GHz
PCN1K59-MPUL774A-PCN1K50-2500CA/18G
WW/YY SERIAL NUMBER
- ALL DIMENSIONS ARE IN MM ; LENGTH TOLERANCES : $\pm 3 \text{ mm}$ FOR $L \leq 300 \text{ mm}$; $\pm 1\%$ FOR $L > 300 \text{ mm}$

CUSTOMER'S APPROVAL

Department or
company's stamp

Name:

Date:

Copy and send back to
ROSNOL CORPORATION BEFORE:

5	LABEL HEAT SHRINK TUBE	HST-W-D12-125C	1	EA
4	HEAT SHRINK TUBE	HST-B-D12.7-125C-G	2X 50	mm
3	CABLE	ROSNOL MPUL774A Cable	2500	mm
2	Precision N Solder Clamp Plug	PCN1K50-0630A/9XX	1	EA
1	Precision N R/A Solder Clamp Plug	PCN1K59-0630A/9XX	1	EA
NO.	DESCRIPTION	PARTS NO.	QTY.	U/M

DIMENSION ARE IN MM [INCH]

TOLERANCES

DECIMALS
.X ± 6.35 [.250"]
.XX ± 3.18 [.125"]
.XXX ± 1.52 [.060"]
DEGREES
X° $\pm 1^\circ$

CUSTOMER

REV

-

UNIT

mm [inch]

APPROVED

DATE

DRAWN

DATE

ROSNOL

RF/Microwave Technology
www.rosnol.com
info@rosnol.com
N-CAGE Code: SFKK0



TITLE

Precision N R/A Plug (Male) to Precision N Plug (Male)
2.5 Meter Cable Assembly for MPUL774A Cable

DRAWING NO.

PCN1K59-MPUL774A-PCN1K50-2500CA/18G