


INFORMATION CONTAINED WITHIN THIS ROSNOL RF/MICROWAVE TECHNOLOGY CORP. DOCUMENT IS CONSIDERED PROPRIETARY AND IS THE PROPERTY OF ROSNOL RF/MICROWAVE TECHNOLOGY CORP.


Rosnol P/N		Length (mm)
PCT1E50-RSF141FEP-PCT2EB F50-650A/6G		650
Frequency	VSWR Max.	Insertion Loss Max.
6 GHz	1.25	≤ 0.00141 (dB/mm) * L (mm) + 0.1 (dB)

SPECIFICATION CONTROL DRAWING

REVISION			
REV.	DESCRIPTION	DATE	APPROVED
-	INITIAL RELEASE	FEB/2/2024	

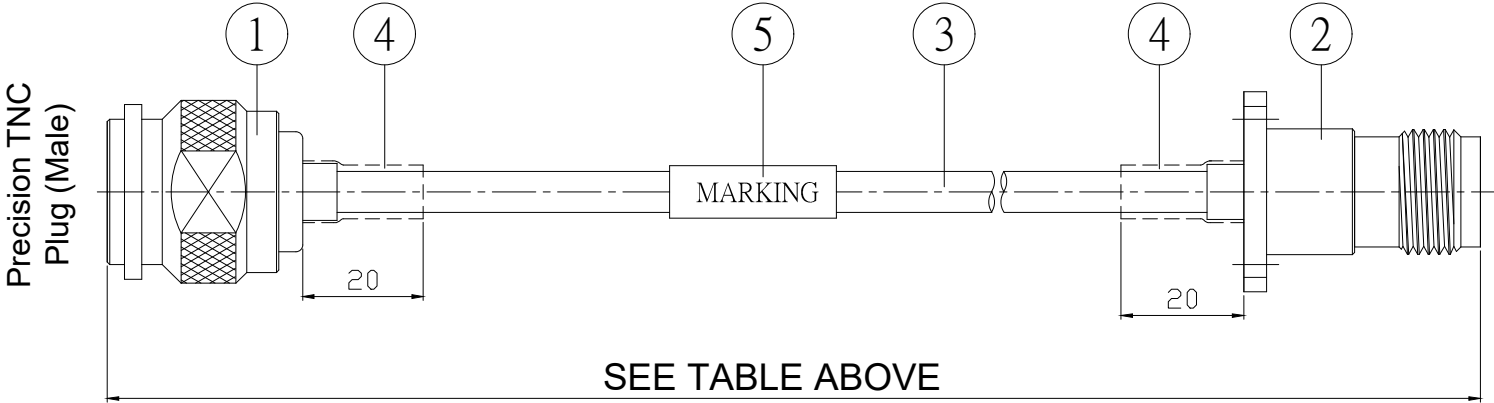

Precision TNC Panel Jack (Female)



5	LABEL HEAT SHRINK TUBE	HST-W-D4-125C-G	1	EA
4	HEAT SHRINK TUBE	HST-B-D6.4-125C	2X 20	mm
3	CABLE	ROSNOL RSF141FEP	650	mm
2	Precision TNC PANEL SOLDER JACK	PCT2EBF50-0141A/9X	1	EA
1	PCT SOLDER PLUG	PCT1E50-0141A/91X	1	EA
NO.	DESCRIPTION	PARTS NO.	QTY.	U/M

DIMENSION ARE IN MM [INCH]		REV	UNIT
TOLERANCES DECIMALS .X ± 6.35 [.250"] .XX ± 3.6 [.125"] .XXX ± 1.52 [.060"] DEGREES X° ± 1°		-	mm [inch]
		DATE	
DRAWN	DATE		

ROSNOL
RF/Microwave Technology
www.rosnol.com
info@rosnol.com
N-CAGE Code: SFKK0

TITLE
Precision TNC Plug (Male) to Precision TNC Jack (Female)
0.65 Meter Cable Assembly for RSF141FEP Cable

DRAWING NO.
PCT1E50-RSF141FEP-PCT2EBF50-650A/6G