


INFORMATION CONTAINED WITHIN THIS ROSNOL RF/MICROWAVE TECHNOLOGY CORP. DOCUMENT IS CONSIDERED PROPRIETARY AND IS THE PROPERTY OF ROSNOL RF/MICROWAVE TECHNOLOGY CORP.

Rosnol P/N		Length (mm)
PCT1K50-MT902A-AMM-PCT1K50-300A /18G		300
Frequency	VSWR Max.	Insertion Loss Max. (dB)
18 GHz	1.4	$\leq 0.2\text{dB @ }1\text{GHz}$ $\leq 0.5\text{dB @ }6\text{GHz}$ $\leq 0.7\text{dB @ }12\text{GHz}$ $\leq 0.9\text{dB @ }18\text{GHz}$

SPECIFICATION CONTROL DRAWING

REVISION

REV.	DESCRIPTION	DATE	APPROVED
-	INITIAL RELEASE	JUL/3/2025	

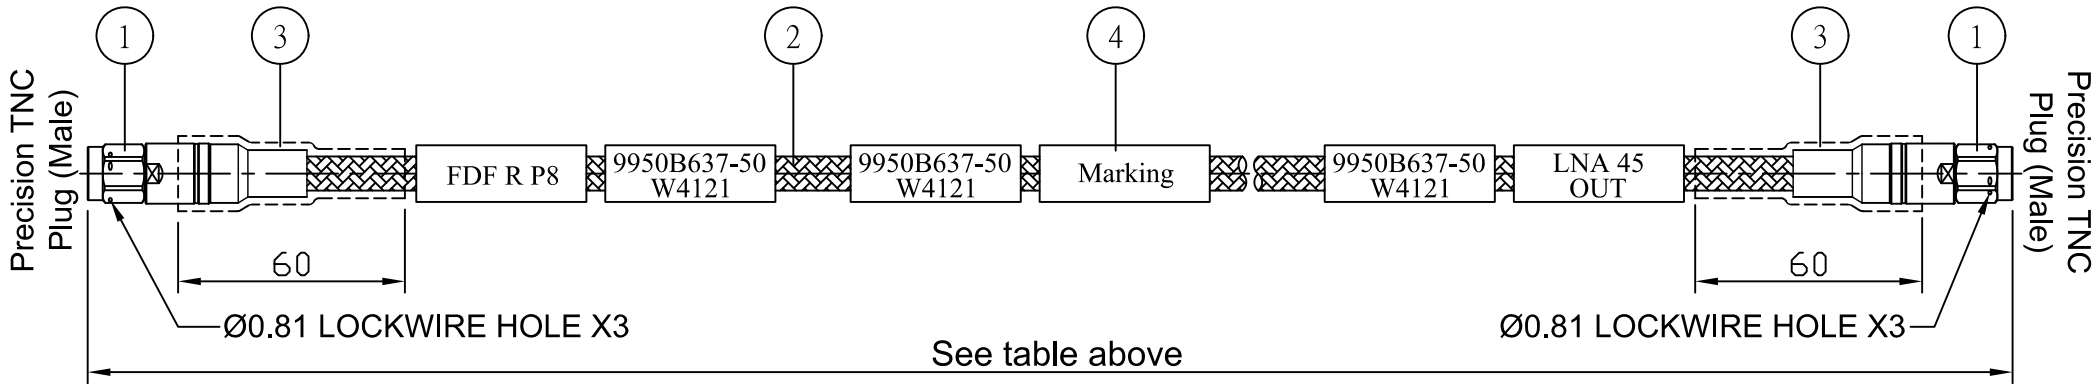

- NOTES:
- 1) CONNECTORS ASSEMBLED PER MANUFACTURERS INSTRUCTIONS.
 - 2) MARKING DETAILS IF NOT SPECIAL MARKING TEXT:
ROSNOL DC- 18 GHz
PCT1K50-MT902A-AMM-PCT1K50-300A/18G_W4121
WW/YY - SERIAL NUMBER
 - 3) ALL DIMENSIONS ARE IN MM ; LENGTH TOLERANCES :
±3 mm FOR L ≤ 300mm ; ±1% FOR L > 300mm
 - 4) Amplitude Matching : ± 0.15 dB

CUSTOMER'S APPROVAL

Department or
company's stamp

Name:

Date:

Copy and send back to
ROSNOL CORPORATION BEFORE:

4	LABEL HEAT SHRINK TUBE	HST-W-D12-125C	1	EA	DIMENSION ARE IN MM [INCH]	CUSTOMER	REV	UNIT
3	HEAT SHRINK TUBE	HST-B-D16-125C-G	2X 60	mm	TOLERANCES DECIMALS .X ± 6.35 [".250"] .XX ± 3.18 [".125"] .XXX ± 1.52 [".060"] DEGREES X° ± 1°	DATE		mm [inch]
2	CABLE	RosnoI MT902A Cable	300	mm		DATE		
1	PRECISION TNC SOLDER CLAMP PLUG	PCT1K50-MT902B/9XX	2	EA		DATE		
NO.	DESCRIPTION	PARTS NO.	QTY.	U/M		DATE		

ROSNOL 
RF/Microwave Technology
www.rosnol.com
info@rosnol.com
N-CAGE Code: SFKK0

TITLE
Precision TNC Plug (Male) to Precision TNC Plug (Male)
0.3 Meter Cable Assembly for MT902A Cable

DRAWING NO.
PCT1K50-MT902A-AMM-PCT1K50-300A/18G