


## BNC Plug Protective Caps With Chain

## BNC1A00-1800A-57 / --4

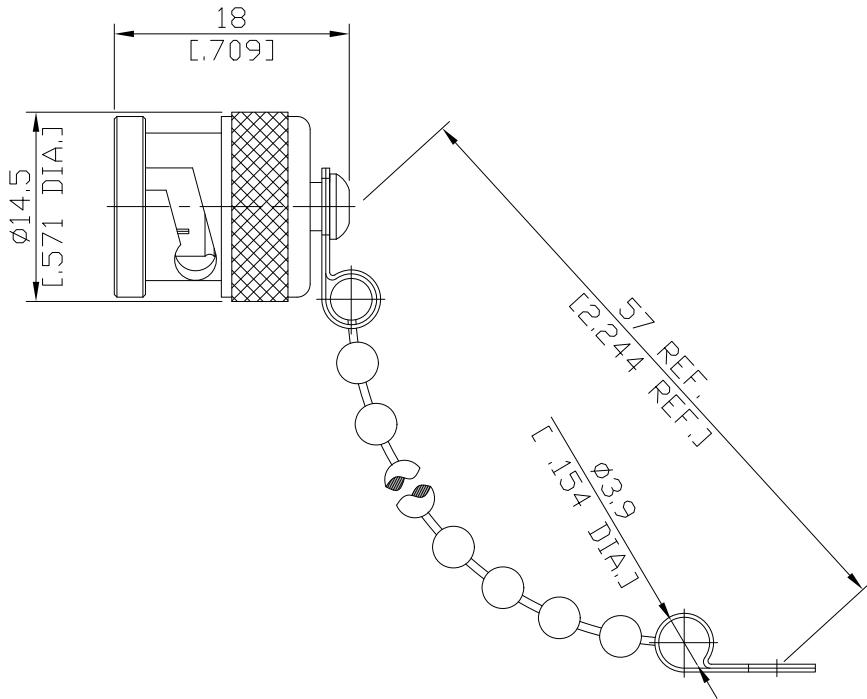

All dimensions are in mm [inch]

Tolerances according to DIN ISO 2768-mH

**Interface**

According to

IEC 61169-8; CECC 22120; MIL-PRF-39012; MIL-STD-348B/301; BS 9210 N 004

**Material And Plating**

## Piece Parts

Coupling Nut

## Material

## Plating

Gasket

Brass

Copper-Tin-Zinc Alloy

Chain

Silicone Rubber

Brass

Copper-Tin-Zinc Alloy

**Mechanical Data**

Coupling mechanisms

Bayonet-lock

Mating Cycles

min. 500

Coupling Test Torque

N/A

Recommended Torque

N/A

**Environmental Data**

Temperature Range

-65°C to +165°C

Thermal shock

MIL-STD-202, Method 107, Condition B

Corrosion

MIL-STD-202, Method 101, Condition B

Vibration

MIL-STD-202, Method 204, Condition B

Shock

MIL-STD-202, Method 213, Condition G

Moisture Resistance

MIL-STD-202, Method 106

RoHS

compliant

**Packing**

Single or 100