


N SHORT  
Nplug (male)

N1AS50-1700A/133

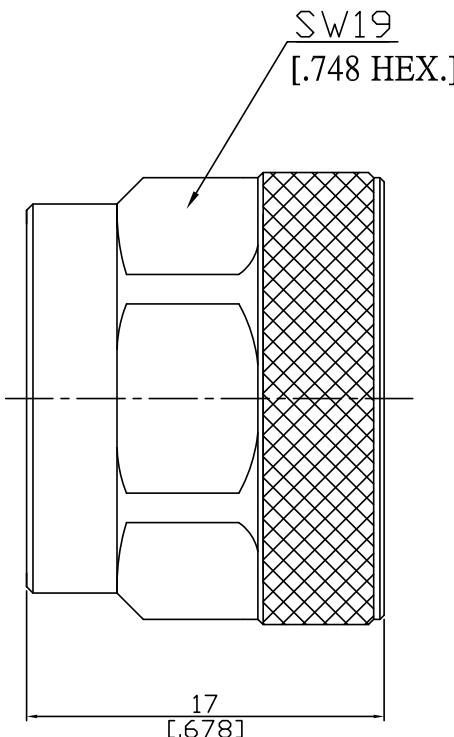

All dimensions are in mm [inch]

Tolerances according to DIN ISO 2768-mH

**Interface**

According to MIL-C-39012; MIL-STD-348A/310

**Electrical Data**

Impedance 50 Ω

Frequency DC to 12.4 GHz

**Mechanical Data**

Coupling mechanisms Screw-lock

Weight N/A

**Environmental Data**

Temperature range -65°C to +165°C

RoHS compliant

**Material And Plating**

Piece Parts (SMA)	Material	Plating
Centre contact	Brass	Gold plating(Nickel underplated)
Body	Brass	Nickel
Gasket	Silicone Rubber	
Coupling nut	Brass	Nickel

**Packing**

Single or 100

The facts and figures herein are carefully compiled to the best of our knowledge, but they are intended for general informational purposes only. In the effort to improve our products, we reserve the right to make changes judged to be necessary.

Rev.:-

Date:  
19/11/10

Rosnol RF/Microwave Technology  
[www.rosnol.com](http://www.rosnol.com); [info@rosnol.com](mailto:info@rosnol.com)  
 Phone: +886-3-463-5095  
 Fax: +886-3-463-5952

Page

1/1