


N Protective Caps With Wire Rope Chain Jack

N2A00-1450B-100 / -3

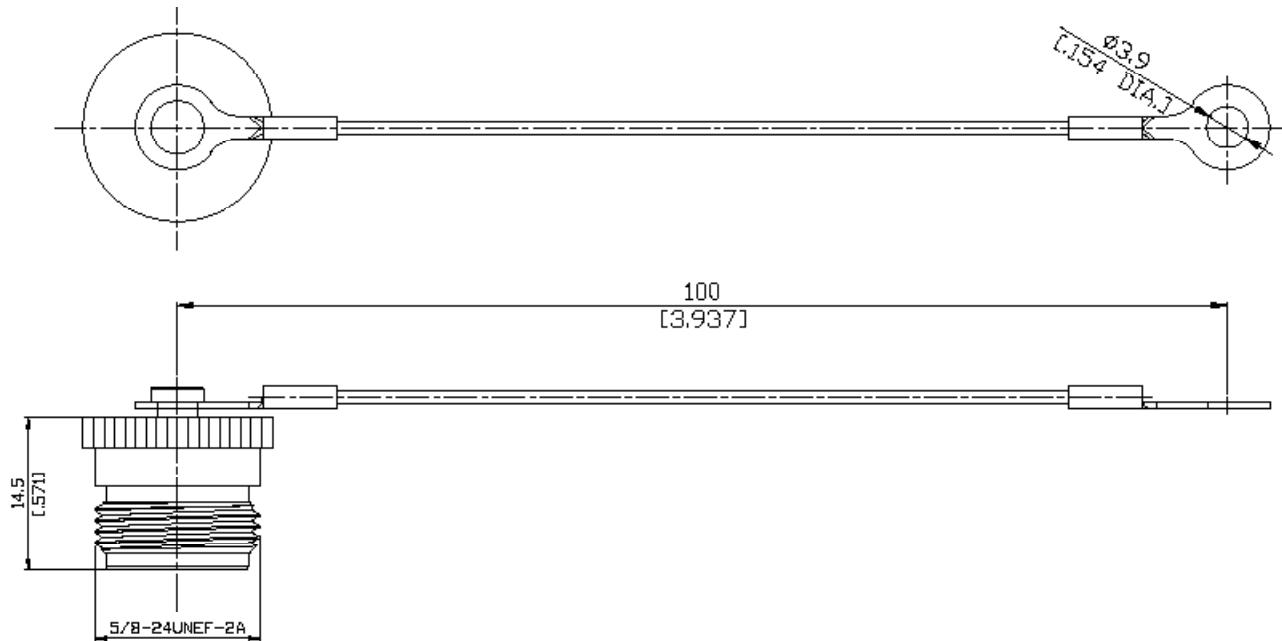

All dimensions are in mm [inch]

Tolerances according to DIN ISO 2768-mH

Interface

According to

MIL-STD-348B/304-2

Material And Plating

Connector parts

Material

Plating

Body

Brass

Nickel

Mechanical Data

Coupling mechanisms

Screw-lock

Mating Cycles

min. 500

Coupling Test Torque

max. 1.7 Nm

Recommended Torque

0.7 Nm to 1.1 Nm

Packing

Single or 100