


N Protective Caps With Chain and S Ring JACK

N2A00-2050C-175 / -4

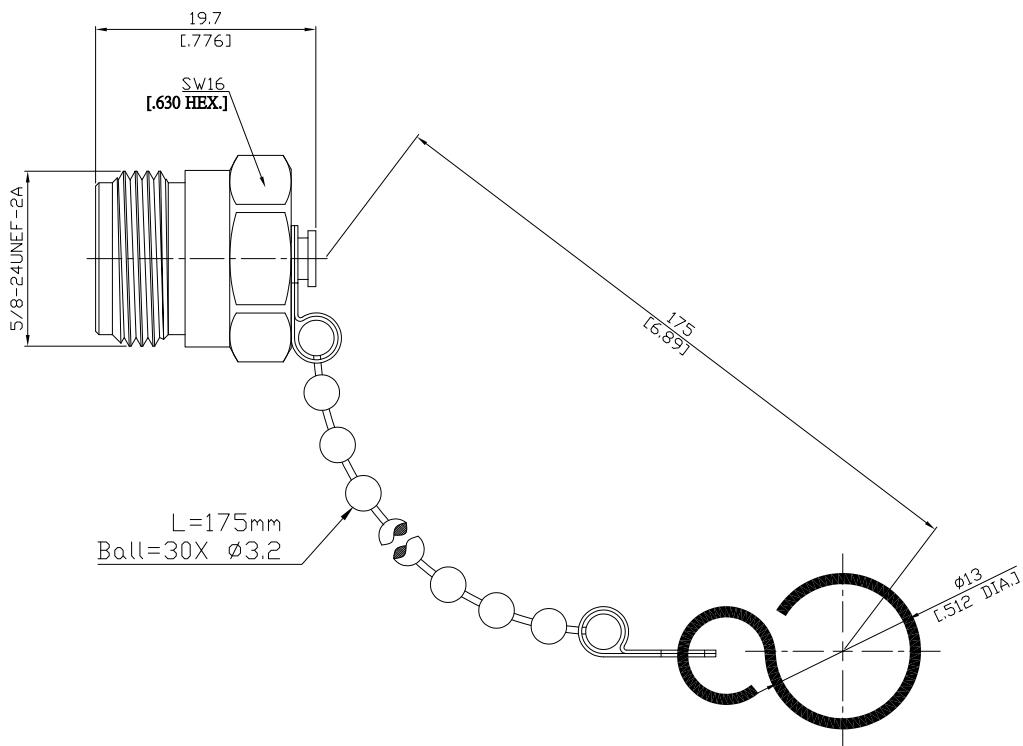

All dimensions are in mm [inch]

Tolerances according to DIN ISO 2768-mH

Interface

According to

IEC 60169-16; MIL-C-39012; MIL-STD-348A/304

Mechanical Data

Coupling mechanisms

Screw-lock

Mating Cycles

≥ 500

Material And Plating**Piece Parts****Material****Plating**

Body

Brass

Copper-Tin-Zinc Alloy

Chain

Brass

Nickel

Environmental Data

Temperature Range

-60°C to +165°C

RoHS

compliant

Packing

Single or 100

The facts and figures herein are carefully compiled to the best of our knowledge, but they are intended for general informational purposes only. In the effort to improve our products, we reserve the right to make changes judged to be necessary.

Rev.:-

Rosnol RF/Microwave Technology Co., Ltd.

www.rosnol.com; info@rosnol.com

Date:

Phone: +886-3-463-5095 / Fax: +886-3-463-5952

12/7/2020

N-CAGE Code: SFKK0 / ISO9001 Certified

Page

1/1