




SMA Plug (Male) Open with Chain

SMA1AO50-1270A-88.9/9QQ

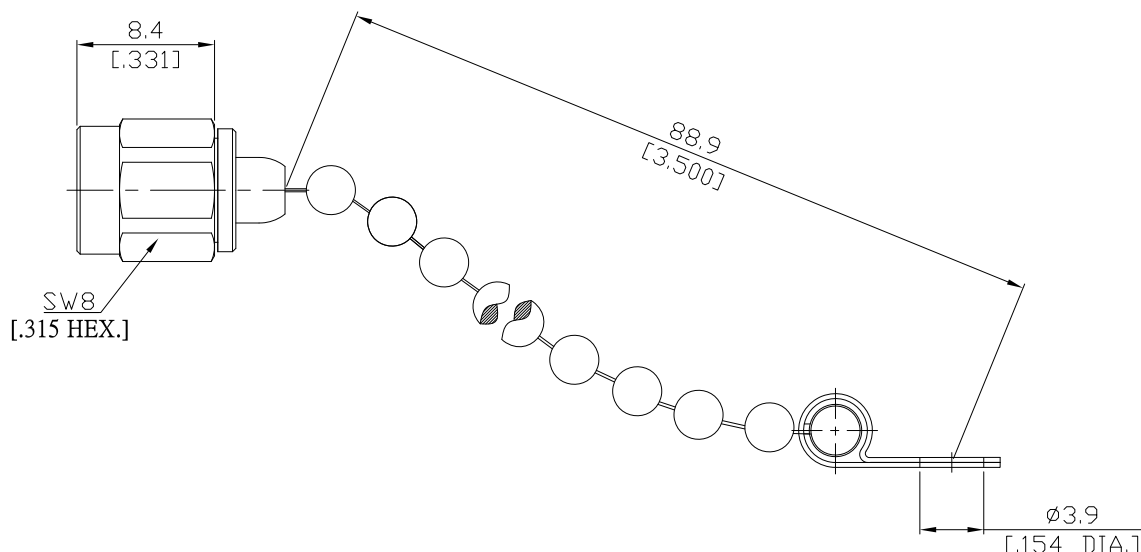

All dimensions are in mm [inch]
Tolerances according to DIN ISO 2768-mH

Interface

According to MIL-STD-348A/310
IEC 60169-15

Electrical Data

Impedance 50 Ω
Frequency DC to 18 GHz
Reflection 100% Nominal

Mechanical Data

Coupling mechanisms Screw-lock
Weight N/A

Environmental Data

Temperature range -65°C to +165°C
RoHS compliant

Material And Plating

Connector parts	Material	Plating
Centre contact	Beryllium Copper	Gold plating(Nickel underplated)
Body	Stainless Steel	Gold plating(Nickel underplated)
Gasket	Silicone Rubber	
Coupling nut	Stainless Steel	Gold plating(Nickel underplated)
Chain	Stainless Steel	Passivated

Packing

Single or 100