




SMA Jack (Female) Open with Chain

SMA2AO50-1270A-88.9/9Q

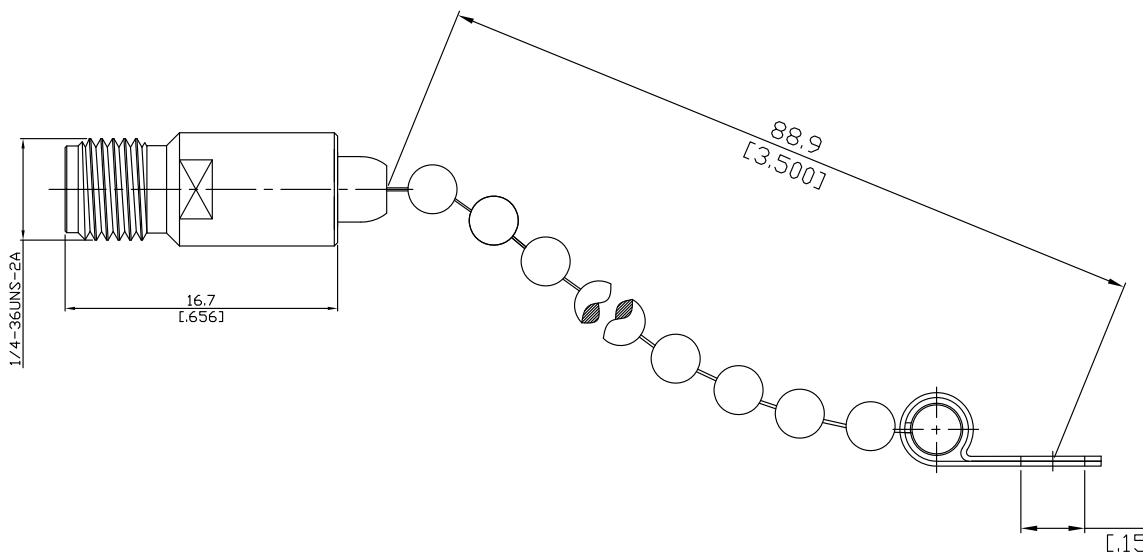

All dimensions are in mm [inch]

Tolerances according to DIN ISO 2768-mH

**Interface**

According to

MIL-STD-348A/310

IEC 60169-15

**Electrical Data**

Impedance	50 Ω
Frequency	DC to 18 GHz
Reflection	100% Nominal

**Mechanical Data**

Coupling mechanisms	Screw-lock
Weight	N/A

**Environmental Data**

Temperature range	-65 °C to +165 °C
RoHS	compliant

**Material And Plating**

Connector parts	Material	Plating
Centre contact	Beryllium Copper	Gold plating(Nickel underplated)
Body	Stainless Steel	Gold plating(Nickel underplated)
Gasket	Silicone Rubber	
Chain	Stainless Steel	Passivated

**Packing**

Single or 100