


TNC Plug (Male) Shorting Cap

TNC2AS50-1620A / H3

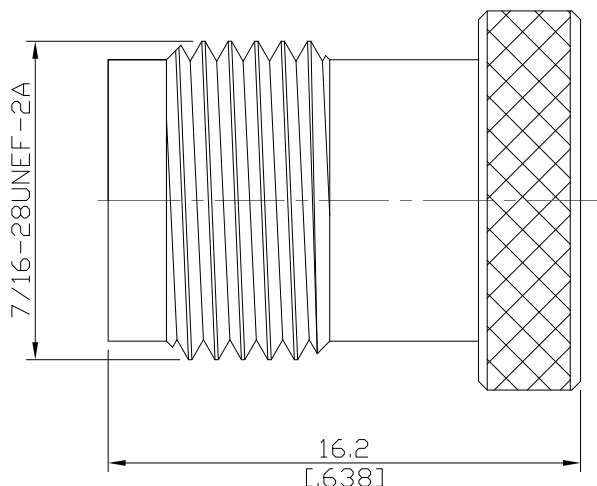

All dimensions are in mm [inch]

Tolerances according to DIN ISO 2768-mH

Interface

According to

IEC 61169-17; CECC22200; MIL-PRF-39012; MIL-STD-348B/313; DIN EN 122200

Electrical Data

Impedance

50 Ω

Frequency

DC to 4 GHz

Material and Plating

Piece Parts	Material	Plating
Centre Contact	Brass	Gold plating (Non-magnetic nickel-phosphorus underplating)
Body	Brass	Nickel
Insulator	PTFE	

Mechanical Data

Coupling Mechanisms

Screw-On

Mating Cycles

≥ 500

Coupling Test Torque

max. 1.70 Nm

Recommended Torque

0.46 Nm to 0.69 Nm

Environmental Data

Temperature Range

-65°C to +165°C

Thermal Shock

MIL-STD-202, Method 107, Condition B

Corrosion

MIL-STD-202, Method 101, Condition B

Vibration

MIL-STD-202, Method 204, Condition B

Shock

MIL-STD-202, Method 213, Condition G

Moisture Resistance

MIL-STD-202, Method 106

RoHS

Compliant

Packing

Single or 100